

# G5 Electronic Flight Instrument Pilot's Guide for Non-Certified Aircraft



Blank Page

**SYSTEM OVERVIEW**

**FLIGHT INSTRUMENTS**

**AFCS**

**ADDITIONAL FEATURES**

**INDEX**

Blank Page

© 2017 Garmin Ltd. or its subsidiaries. All rights reserved.

This manual reflects the operation of System Software version 4.10 or later. Some differences in operation may be observed when comparing the information in this manual to earlier or later software versions.

Garmin International, Inc., 1200 East 151st Street, Olathe, Kansas 66062, U.S.A.

Garmin AT, Inc., 2345 Turner Road SE, Salem, OR 97302, U.S.A.

Garmin (Europe) Ltd., Liberty House, Hounsdown Business Park, Southampton, Hampshire SO40 9LR U.K.

Garmin Corporation, No. 68, Zhangshu 2nd Road, Xizhi District, New Taipei City, Taiwan

Web Site Address: [www.garmin.com](http://www.garmin.com)

Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express written permission of Garmin. Garmin hereby grants permission to download a single copy of this manual and of any revision to this manual onto a hard drive or other electronic storage medium to be viewed for personal use, provided that such electronic or printed copy of this manual or revision must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Garmin® is a registered trademark of Garmin Ltd. or its subsidiaries. This trademark may not be used without the express permission of Garmin.



### **BATTERY WARNINGS:**

*If these guidelines are not followed, the lithium-ion battery may experience a shortened life span or may present a risk of damage to the device, fire, chemical burn, electrolyte leak, and/or injury.*

- *Do not leave the battery exposed to a heat source or in a high temperature environment. To help prevent damage, store the battery out of direct sunlight.*
- *For maximum battery longevity, store within a temperature range of -4°F to 68°F (from -20°C to 20°C).*
- *Do not use a sharp object to remove the battery.*
- *Do not disassemble, puncture, damage, or incinerate the device or battery.*
- *Keep the battery away from children.*
- *Only replace the battery with the approved replacement from Garmin. Using another battery presents a risk of fire or explosion. To purchase a replacement battery, see you Garmin dealer or the Garmin website.*
- *Contact your local waste disposal department to dispose of the device and battery in accordance with applicable local laws and regulations.*



**WARNING:** *To reduce the risk of unsafe operation, carefully review and understand all aspects of the G5 Install Manual & Pilot's Guide documentation and the Pilot's Operating Handbook of the aircraft. Thoroughly practice basic operation prior to actual use. During flight operations, carefully compare indications from the G5 to all available flight displays. For safety purposes, always resolve any discrepancies.*



**WARNING:** *The altitude calculated by the G5 internal GPS receiver is geometric height above Mean Sea Level and could vary significantly from the altitude displayed by pressure altimeters. Always use the pressure altitude display, when available, for determining or selecting aircraft altitude.*



**WARNING:** *The United States government operates the Global Positioning System and is solely responsible for its accuracy and maintenance. The GPS system is subject to changes which could affect the accuracy and performance of all GPS equipment.*



---

**WARNING:** For safety reasons, the G5 operational procedures must be learned on the ground.

---



---

**WARNING:** This product, its packaging, and its components contain chemicals known to the State of California to cause cancer, birth defects, or reproductive harm. This Notice is being provided in accordance with California Proposition 65. If you have any questions or would like additional information, please refer to our website at [www.garmin.com/prop65](http://www.garmin.com/prop65)

---



---

**CAUTION:** The display uses a lens with a special coating that may be sensitive to certain oils, waxes, and abrasive cleaners. **CLEANERS CONTAINING AMMONIA WILL HARM THE ANTI-REFLECTIVE COATING.** It is very important to clean the lens using a clean, lint-free cloth and a cleaner that is specified as safe for anti-reflective coatings. Avoid any chemical cleaners or solvents that can damage plastic components.

---



---

**CAUTION:** The G5 does not contain any user-serviceable parts. Repairs should only be made by an authorized Garmin service center. Unauthorized repairs or modifications could result in permanent damage to the equipment and void both the warranty and the authority to operate this device under FAA, FCC, and other applicable regulations.

---



---

**NOTE:** The G5 may only be installed in type-certificated aircraft in accordance with Garmin STC SA01818WI.

---



---

**NOTE:** The term LRU, as used throughout this manual is an abbreviation for Line Replaceable Unit. LRU is used generically in aviation for a product (such as a GSA 28 or GMC 307) that can be readily "swapped out" (usually as a single component) for troubleshooting/repair.

---



---

**NOTE:** *The G5 has a very high degree of functional integrity. However, the pilot must recognize that providing monitoring and/or self-test capability for all conceivable system failures is not practical. Although unlikely, it may be possible for erroneous operation to occur without a fault indication shown by the G5. It is thus the responsibility of the pilot to detect such an occurrence by means of cross-checking with all redundant or correlated information available in the cockpit.*

---



---

**NOTE:** *All visual depictions contained within this document, including screen images of the G5 display, are subject to change and may not reflect the most current G5 functionality.*

---



---

**NOTE:** *Use of polarized eyewear may cause the display to appear dim or blank.*

---



## **DECLARATION OF CONFORMITY**

---

Hereby, Garmin declares that this product is in compliance with the Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address [www.garmin.com/compliance](http://www.garmin.com/compliance).

### **FCC**

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **LICENSE AGREEMENT AND WARRANTY**

---

### **CONTACT GARMIN**

Contact Garmin if you have any questions while using the G5 at [www.flygarmin.com](http://www.flygarmin.com).

### **SOFTWARE LICENSE AGREEMENT**

BY USING THE DEVICE, COMPONENT OR SYSTEM MANUFACTURED OR SOLD BY GARMIN ("THE GARMIN PRODUCT"), YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY. Garmin Ltd. and its subsidiaries ("Garmin") grants you a limited license to use the software embedded in the Garmin Product (the "Software") in binary executable form in the normal operation of the Garmin Product. Title, ownership rights, and intellectual property

rights in and to the Software remain with Garmin and/or its third-party providers. You acknowledge that the Software is the property of Garmin and/or its third-party providers and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge that the structure, organization, and code of the Software are valuable trade secrets of Garmin and/or its third-party providers and that the Software in source code form remains a valuable trade secret of Garmin and/or its third-party providers. You agree not to reproduce, decompile, disassemble, modify, reverse assemble, reverse engineer, or reduce to human readable form the Software or any part thereof or create any derivative works based on the Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.

### **AVIATION LIMITED WARRANTY**

All Garmin avionics products are warranted to be free from defects in materials or workmanship for the earlier of: 2 years or 800 flight hours from the date of purchase for new TSO remote-mount and TSO panel-mount products; 1 year or 400 flight hours from the date of purchase for new Non-TSO remote-mount\* and Non-TSO panel-mount\*, portable products and any purchased newly-overhauled products; 6 months or 200 flight hours for factory repaired or newly-overhauled products exchanged through a Garmin Authorized Service Center. Within the applicable period, Garmin will, at its sole option, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the customer for parts or labor, provided that the customer shall be responsible for any transportation cost. This Limited Warranty does not apply to: (i) cosmetic damage, such as scratches, nicks and dents; (ii) consumable parts, such as batteries, unless product damage has occurred due to a defect in materials or workmanship; (iii) damage caused by accident, abuse, misuse, water, flood, fire, or other acts of nature or external causes; (iv) damage caused by service performed by anyone who is not an authorized service provider of Garmin; or (v) damage to a product that has been modified or altered without the written permission of Garmin. In addition, Garmin reserves the right to refuse warranty claims against products or services that are obtained and/or used in contravention of the laws of any country. This Limited Warranty also does not apply to, and Garmin is not responsible for, any degradation in the performance of any Garmin navigation product resulting from its use in proximity to any handset or other device that utilizes a terrestrial broadband network operating on frequencies that are close to the frequencies used by any Global Navigation Satellite System (GNSS) such as the Global Positioning Service (GPS). Use of such devices may impair reception of GNSS signals.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

IN NO EVENT SHALL GARMIN BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, WHETHER RESULTING FROM THE USE, MISUSE OR INABILITY TO USE THE PRODUCT OR FROM DEFECTS IN THE PRODUCT. SOME STATES DO NOT ALLOW THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

Garmin retains the exclusive right to repair or replace (with a new or newly-overhauled replacement product) the product or software or offer a full refund of the purchase price at its sole discretion. SUCH REMEDY SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY.

**Online Auction Purchases:** Products purchased through online auctions are not eligible for warranty coverage. Online auction confirmations are not accepted for warranty verification. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required. Garmin will not replace missing components from any package purchased through an online auction.

**International Purchases:** A separate warranty may be provided by international distributors for devices purchased outside the U.S. depending on the country. If applicable, this warranty is provided by the local in-country distributor and this distributor provides local service for your device. Distributor warranties are only valid in the area of intended distribution. Devices purchased in the U.S. or Canada must be returned to the Garmin service center in the U.K., the U.S., Canada, or Taiwan for service.

\*All new G3X units, including Non-TSO remote-mount or Non-TSO panel-mount, are warranted to be free from defects in materials or workmanship for the earlier of: 2 years or 800 flight hours from the date of purchase.



Part Number	Change Summary
190-02072-00	Initial release.

Rev	Date	Description
A	April, 2016	Production Release.
B	April, 2016	Updates to Installation Manual section.
C	September, 2016	Added interconnect drawings, various updates
D	December, 2016	Added autopilot trim and speed annunciations.
E	May, 2017	Added GMU 11 info, various updates
F	June, 2017	Added Declaration of Conformity for RED compliance
G	October, 2017	Removed Installation Manual section Updated AFCS Status Display throughout Added Electronic Stability & Protection (ESP) Added support for multiple navigation sources Added 'Unable to Charge Battery' indication Added ability to configure Sky Pointer or Ground Pointer Other miscellaneous updates for Software Version 4.10

- Section 1 System Overview** ..... 5
  - 1.1 Bezel Overview** ..... 5
  - 1.2 MICRO-SD™ Cards** ..... 6
  - 1.3 System Power-up** ..... 6
  - 1.4 Operation** ..... 7
    - 1.4.1 G5 Annunciations ..... 7
    - 1.4.2 G5 Attitude ..... 7
    - 1.4.3 G5 Heading ..... 8
    - 1.4.4 Backlight Intensity ..... 8
  - 1.5 Accessing Functionality** ..... 9
    - 1.5.1 Pages ..... 9
    - 1.5.2 Menu ..... 10
  
- Section 2 Flight Instruments** ..... 11
  - 2.1 PFD Page** ..... 11
    - 2.1.1 Airspeed Indicator ..... 12
    - 2.1.2 Attitude Indicator ..... 15
    - 2.1.3 Altimeter ..... 17
    - 2.1.4 Turn Rate Indicator ..... 19
    - 2.1.5 Heading/Ground Track (PFD Page) ..... 19
    - 2.1.6 Vertical Speed Indicator (VSI) ..... 21
    - 2.1.7 PFD Pitch Attitude Offset ..... 22
    - 2.1.8 Battery Status Indicator ..... 23
  - 2.2 HSI Page** ..... 24
    - 2.2.1 Horizontal Situation Indicator (HSI) ..... 25
    - 2.2.2 Heading/Ground Track (HSI Page) ..... 28
  - 2.3 Navigation** ..... 29
    - 2.3.1 Course Deviation Indicator (CDI) ..... 30
    - 2.3.2 Vertical Deviation Indicator and VNAV Indicator ..... 32
    - 2.3.3 Course Selection ..... 36
  
- Section 3 Automatic Flight Control System (Optional)** ..... 37
  - 3.1 AFCS System Architecture** ..... 37
    - 3.1.1 Autopilot and Yaw Damper Operation ..... 37
    - 3.1.2 Flight Control ..... 38
    - 3.1.3 Pitch Axis and Trim ..... 38
    - 3.1.4 Roll Axis ..... 38
    - 3.1.5 Yaw Axis ..... 38
    - 3.1.6 Control Wheel Steering (CWS) (Optional) ..... 39
    - 3.1.7 G5 AFCS Status Box ..... 39
    - 3.1.8 G5 AFCS Configuration ..... 40
    - 3.1.9 AFCS Operation ..... 40
    - 3.1.10 AFCS PRE-FLIGHT Actions (Standalone Installation) ..... 41

3.1.11 AFCS Controls .....	42
3.1.12 Flight Director Operation .....	47
3.1.13 Vertical Modes .....	52
3.1.14 Lateral Modes .....	63
<b>3.2 System Messages</b> .....	71
<b>3.3 AFCS Alerts (Optional)</b> .....	72
3.3.1 Status Alerts.....	72
3.3.2 Speed Alerts.....	72
<b>Section 4 Additional Features</b> .....	73
<b>4.1 Electronic Stability &amp; Protection (ESP)</b> .....	73
4.1.1 Roll Engagement.....	75
4.1.2 Pitch Engagement .....	76
4.1.3 Airspeed Protection .....	78
<b>Index</b> .....	Index-1



Blank Page



# SECTION 1 SYSTEM OVERVIEW

The G5 is an electronic instrument display capable of operating as a standalone flight display or a fully integrated backup instrument for G3X systems. It features a bright, sunlight readable, 3.5-inch color display which is sized to fit in a standard 3-1/8-inch instrument cutout.

When installed as part of a G3X system, the G5 provides a redundant source of attitude and air data to the G3X displays, and additionally provides backup autopilot control allowing coupled GPS approaches to be flown or continued in the event of primary flight display is unavailability. The G5 additionally provides backup autopilot control allowing coupled GPS approaches to be flown or continued in the event of primary flight display loss. In the case of aircraft power loss, the optional battery backup sustains the G5 flight display with up to 4 hours of emergency power.

## 1.1 BEZEL OVERVIEW



**Figure 1-1 G5 Bezel Overview**

<b>Power Button</b>		Press to turn unit ON. Press and hold for 5 seconds to turn unit OFF. Once on, press to adjust the backlight.
<b>microSD™ Card Slot</b>		Insert microSD card to update software and log data.
<b>Knob</b>	<b>Press</b>	Press to access the Menu. From the Menu, press to select the desired menu item. Press to accept the displayed value when editing numeric data or selecting from a list.
	<b>Turn</b>	From the Main Menu, turn the Knob to move the cursor to the desired menu item. From the PFD Page, rotate to adjust the barometric setting. From the HSI Page, rotate to adjust the heading or track bug. Turn to select the desired value when editing numeric data or selecting from a list.

## 1.2 MICRO-SD™ CARDS

The G5 data card slot uses micro Secure Digital (SD) cards. The microSD™ card can be used for software updates and data logging. The maximum supported card size is 32GB.

### Installing an microSD™ Card:

- 1) Insert the microSD™ card in the microSD™ card slot with the card contacts facing down (the card should be flush with the face of the bezel).
- 2) To eject the card, gently press on the microSD™ card to release the spring latch.

## 1.3 SYSTEM POWER-UP

During system initialization, the G5 displays the message 'ALIGNING' over the attitude indicator. The G5 should display valid attitude typically within the first minute of power-up. The G5 can align itself both while taxiing and during level flight.

# 1.4 OPERATION



**NOTE:** Refer to the Installation portion of this manual for information on configuring the G5.

## 1.4.1 G5 ANNUNCIATIONS

When a G5 function fails, a Red-X is typically displayed over the instrument(s) or data experiencing the failure. Upon G5 power-up, certain instruments remain invalid as equipment begins to initialize. All instruments should be operational within one minute of power-up. If any instrument remains flagged, and it is not likely an installation related problem, the G5 should be serviced by a Garmin-authorized repair facility .



Figure 1-2 G5 Failure Annunciations

## 1.4.2 G5 ATTITUDE

The G5 calculates aircraft attitude using information from its built-in inertial sensors. Any failure of the inertial sensors results in loss of attitude and information (indicated by Red-X flags over the PFD attitude display). If the G5 senses that the attitude solution is valid, but not yet within the internal accuracy limits, "ALIGNING" is displayed. The G5 can align itself both while taxiing and during level flight.

The G5 will also use GPS and airspeed data to provide the most accurate attitude information. If none of these additional sources of information are available, attitude calculations will still be valid but accuracy may be slightly affected.

### 1.4.3 G5 HEADING

Magnetic heading is available in a standalone installation with a magnetometer, and when the G5 is configured as a backup in a G3X/G3X Touch system and the G5 is receiving magnetic heading data from an ADAHRS unit. If magnetic heading input data is not available, the G5 will display GPS-derived ground track instead.

The G5 corrects for shifts and variations in the Earth's magnetic field by applying the Magnetic Field Variation Database. The Magnetic Field Variation Database is derived from the International Geomagnetic Reference Field (IGRF). The IGRF is a mathematical model that describes the Earth's main magnetic field and its annual rate of change. The database is updated approximately every 5 years via a software update. Failure to update this database could lead to erroneous heading information being displayed to the pilot.

If the G5 senses that the magnetic heading measurement is valid, but possibly outside of the internal accuracy limits, the numeric heading is displayed in yellow.

### 1.4.4 BACKLIGHT INTENSITY

When set to Auto, the backlight is automatically adjusted according to ambient light conditions. When set to Manual, the backlight level is set by the pilot.

#### Adjusting backlight intensity:

- 1) While the unit is turned on, press the **Power** Button.
- 2) Turn the Knob to adjust the backlight intensity.
- 3) Press the Knob to close the backlight page.

#### Setting the backlight intensity to automatic:

- 1) While the unit is turned on, press the Power Button.
- 2) Press the **Power** Button again to select **Auto**.
- 3) Press the Knob to close the backlight page.

# 1.5 ACCESSING FUNCTIONALITY

## 1.5.1 PAGES



**NOTE:** The G5 will automatically return to the PFD Page when the aircraft enters an unusual attitude (if enabled in the system configuration). Refer to the Installation Manual section for more information.

The G5 has two main pages, the HSI Page and the PFD Page. The HSI Page can be accessed from the PFD Page (unless it has been disabled in configuration).



Figure 1-3 PFD Page



Figure 1-4 HSI Page

### Displaying the HSI page from the PFD page:

- 1) From the PFD Page press the **Knob** to display the Menu.
- 2) Use the Knob to select **HSI**.



**NOTE:** The G5 can be configured to power-up on either the PFD or HSI page (if allowed by the current system configuration). Refer to the Installation Manual section for more information.

### 1.5.2 MENU

Press the Knob to access the G5 Menu. Navigate the menu by rotating the Knob and make selections by pressing the Knob.



Figure 1-5 PFD Page Menu



Figure 1-6 HSI Page Menu

# SECTION 2 FLIGHT INSTRUMENTS

## 2.1 PFD PAGE

The G5 PFD Page displays a horizon, airspeed, attitude, altitude, vertical speed, heading, and course deviation information. The following flight instruments and supplemental flight data are displayed on the PFD Page.

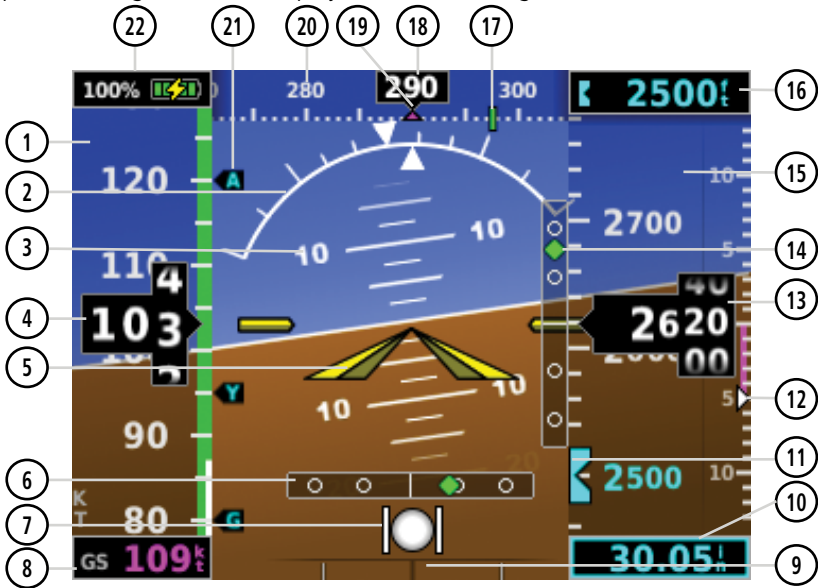


Figure 2-1 G5 PFD Flight Instruments

- |   |                              |   |  |
|---|------------------------------|---|--|
| ① | Airspeed Indicator           | ⑫ | Vertical Speed Indicator                       |
| ② | Attitude Indicator           | ⑬ | Current Altitude                               |
| ③ | Pitch Scale                  | ⑭ | VNAV Indicator or Vertical Deviation Indicator |
| ④ | Current Airspeed             | ⑮ | Altimeter                                      |
| ⑤ | Aircraft Symbol              | ⑯ | Selected Altitude                              |
| ⑥ | Course Deviation Indicator   | ⑰ | Navigation Course                              |
| ⑦ | Slip/Skid Indicator          | ⑱ | Current Heading or Ground Track                |
| ⑧ | Ground Speed (GS)            | ⑲ | Ground Track                                   |
| ⑨ | Turn Rate Indicator          | ⑳ | Heading or Ground Track                        |
| ⑩ | Altimeter Barometric Setting | ㉑ | Vspeed Reference                               |
| ⑪ | Selected Altitude Bug        | ㉒ | Battery Status Indicator                       |

## 2.1.1 AIRSPEED INDICATOR



**NOTE:** The G5 Vspeed Reference values depend upon the aircraft's specific system configuration and may vary from the examples discussed in this section.

The Airspeed Indicator displays airspeed on a rolling number gauge using a moving tape. The numeric labels and major tick marks on the moving tape are marked at intervals of 10 knots. Speed indication starts at 30 knots, with 60 knots of airspeed viewable at any time. The actual airspeed is displayed inside the black pointer. The pointer remains black until reaching never-exceed speed ( $V_{NE}$ ), at which point it turns red.

A color-coded (red, white, green, yellow, and red/white "barber pole") speed range strip is located on the moving tape. The colors denote flaps operating range, normal operating range, caution range, and never-exceed speed ( $V_{NE}$ ). A red range is also present for low speed awareness.



The Airspeed Trend Vector is a vertical, magenta line, extending up or down on the airspeed scale, shown to the right of the color-coded speed range strip. The end of the trend vector corresponds to the predicted airspeed in 6 seconds if the current rate of acceleration is maintained. If the trend vector crosses  $V_{NE}$ , the text of the actual airspeed readout changes to yellow. The trend vector is absent if the speed remains constant or if any data needed to calculate airspeed is not available due to a system failure.

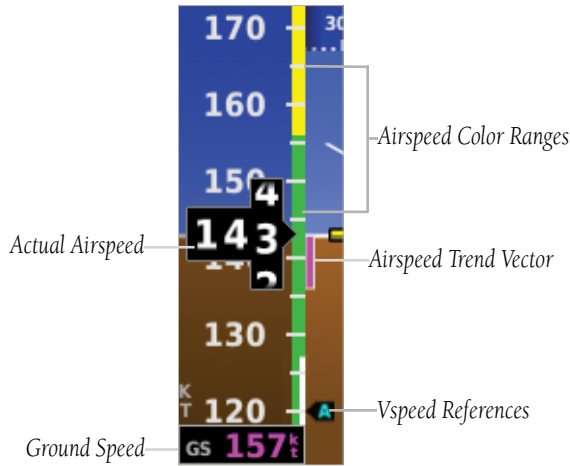


Figure 2-2 Airspeed Indicator

### 2.1.1.1 $V_{NE}$ ADJUSTED FOR TRUE AIRSPEED OR MACH NUMBER (OPTIONAL)



**NOTE:** Mach number data is only available when the G5 is installed as part of a G3X/G3X Touch system and is receiving air temperature data from an ADAHRS.

The airspeed indicator can optionally be configured to display  $V_{NE}$  adjusted for true airspeed or maximum Mach number (MMO). This is useful in aircraft where true airspeed or Mach number must be kept below a certain limit. If configured, the G5 can display  $V_{NE}$  based on TAS or Mach in addition to IAS, which will cause the displayed value for  $V_{NE}$  to be reduced at high altitudes. A solid red band is used between the TAS or Mach limit and the actual indicated value for  $V_{NE}$ .

### 2.1.1.2 VSPEED REFERENCE

Vspeed references including  $V_{NE}$ ,  $V_{no}$ ,  $V_{so}$ ,  $V_{s1}$ ,  $V_{fe}$ ,  $V_{ar}$ ,  $V_x$ ,  $V_y$ ,  $V_{yse}$ ,  $V_{gr}$ ,  $V_r$  can be configured to display on the G5, refer to the Installation Manual section for more information.

When airspeed is present, the Vs speeds configured are displayed at their respective locations to the right of the airspeed scale, otherwise the Vs speeds are displayed at the bottom of the airspeed indicator.

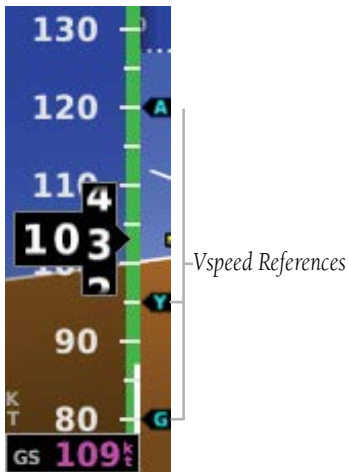


Figure 2-3 Vspeed References


## 2.1.2 ATTITUDE INDICATOR

Attitude information is displayed over a virtual blue sky and brown ground with a white horizon line. The Attitude Indicator displays the pitch (indicated by the yellow symbolic aircraft on the pitch scale), roll, and slip/skid information.


The horizon line is part of the pitch scale. Pitch markings occur at 2.5° intervals through all pitch ranges. Refer to the Installation Manual section to configure the pitch scale.

The inverted white triangle indicates zero on the roll scale. Major tick marks at 30° and 60° and minor tick marks at 10°, 20°, and 45° are shown to the left and right of the zero.


Slip/skid is indicated by the location of the ball.

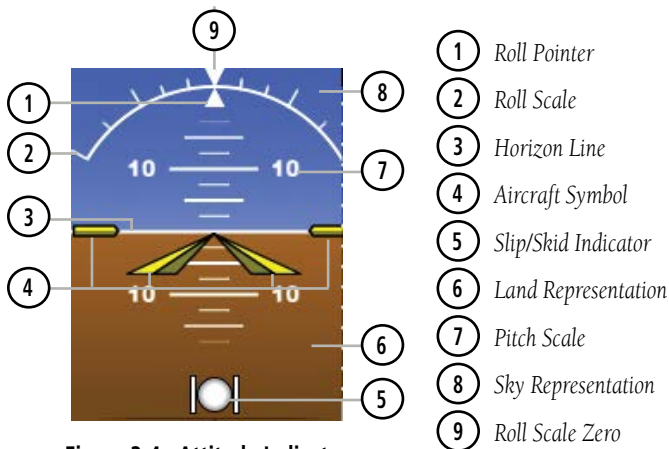

**Figure 2-4 Attitude Indicator**

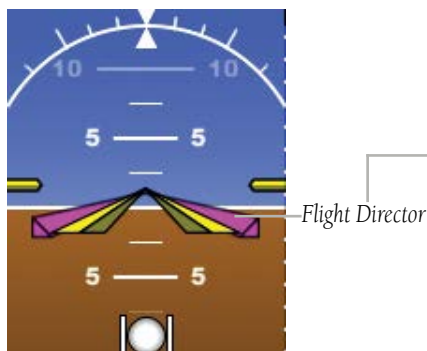

**Figure 2-5 Attitude Indicator with Flight Director (Single Cue)**

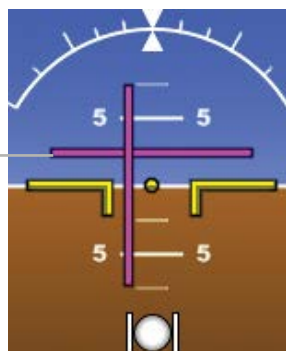

**Figure 2-6 Attitude Indicator with Flight Director (Dual Cue)**

### 2.1.2.1 ATTITUDE CONFIGURATION

System Overview

Flight Instruments

AFC

Additional Features

Index

The roll (bank angle) indication may be configured to be a Ground Pointer (default) or a Sky Pointer. Refer to the G5 Installation Manual for configuration information.

The Ground Pointer configuration displays both the roll arc and the pitch ladder anchored to the horizon and the roll pointer beneath the roll arc pointing to the present roll angle.



Figure 2-7 Ground Pointer Configuration

The Sky Pointer configuration displays the pitch ladder moving with the horizon, but the roll arc remains fixed and centered in the display. The roll pointer beneath the roll arc moves with the horizon and in the opposite direction of aircraft roll.



Figure 2-8 Sky Pointer Configuration

### 2.1.3 ALTIMETER

The Altimeter displays 400 feet of barometric altitude values at a time on a rolling number gauge using a moving tape. Numeric labels and major tick marks are shown at intervals of 100 feet. Minor tick marks are at intervals of 20 feet. The current altitude is displayed in the black pointer.

The Selected Altitude is displayed above the Altimeter in the box indicated by a selection bug symbol. A bug corresponding to this altitude is shown on the tape; if the Selected Altitude exceeds the range shown on the tape, the bug appears at the corresponding edge of the tape.

The Selected Altitude is synchronized between the G5 and the other displays in a G3X/G3X Touch system.

#### Setting the selected altitude:

Rotate the ALT SEL Knob on the GMC 307.

Or

- 1) Press the Knob to display the Menu.
- 2) Select **Altitude** and use the Knob to change the Selected Altitude.

#### Syncing to the current altitude:

Press the ALT SEL Knob on the GMC 307.

Or

- 1) Press the Knob to display the Menu.
- 2) Select **Altitude** and press and hold the Knob to sync the Selected Altitude to the current altitude

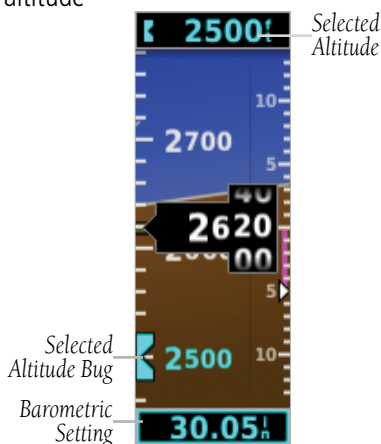


Figure 2-9 Altimeter

### 2.1.3.1 BAROMETRIC PRESSURE

The barometric pressure setting is displayed below the Altimeter in inches of mercury (in Hg) or hectopascals (hPa) when metric units are selected. The barometric pressure setting is synchronized between the G5 and the other displays in a G3X/G3X Touch system.

#### Selecting the altimeter barometric pressure setting:

Turn the Knob to set the barometric pressure.

### 2.1.3.2 ALTITUDE ALERTING

The Altitude Alerting function provides the pilot with a visual alert when approaching the Selected Altitude. Whenever the Selected Altitude is changed, the Altitude Alerter is reset. The following will occur when approaching the Selected Altitude:

- Passing within 1,000 feet of the Selected Altitude, the Selected Altitude (shown above the Altimeter) flashes for 5 seconds.
- When the aircraft passes within 200 feet of the Selected Altitude, the Selected Altitude flashes for 5 seconds to indicate that the aircraft is approaching the selected altitude.
- After reaching the Selected Altitude, if the pilot flies outside the deviation band ( $\pm 200$  Feet of the Selected Altitude), the Selected Altitude changes to yellow text on a black background, flashes for 5 seconds.

*Deviation of  $\pm 200$  feet*




Figure 2-10 Altitude Alerting Visual Annunciation

### 2.1.4 TURN RATE INDICATOR

The Turn Rate Indicator is located at the bottom of the PFD Page. Tick marks to the left and right of the displayed heading denote standard turn rates (3 deg/sec). A magenta Turn Rate Trend Vector shows the current turn rate. A standard-rate turn is shown on the indicator by the trend vector stopping at the standard turn rate tick mark.

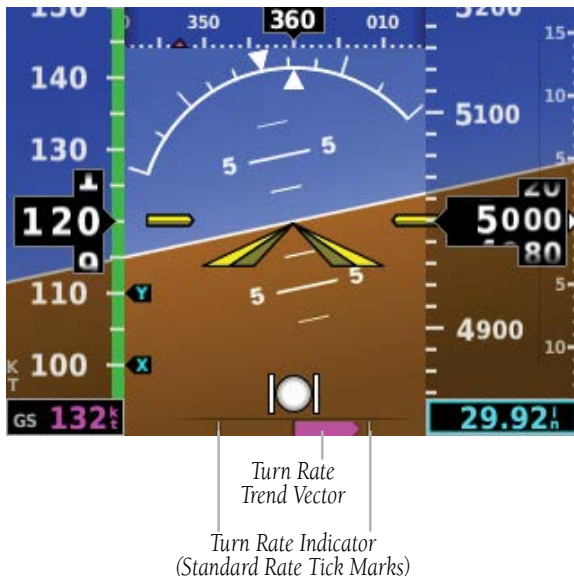


Figure 2-11 Turn Rate Indicator

### 2.1.5 HEADING/GROUND TRACK (PFD PAGE)



**NOTE:** Heading is displayed if magnetometer data is available from a magnetometer via the CAN network. Otherwise, Ground Track is displayed.

A Heading/Ground Track Tape is displayed at the top of the PFD Page and displays numeric labels every 10°. Major tick marks are at 5° intervals and minor tick marks at 1° intervals. The current track is represented by a magenta triangle. The Heading/Ground Track Tape also displays the navigation course.

When displaying the Selected Heading, a light blue bug on the tape corresponds to the Selected Heading. When displaying Ground Track, a magenta bug is displayed on the tape. The selected heading is synchronized between the G5 and the other displays in a G3X/G3X Touch system.

### Adjusting the selected heading or ground track:

Use the HDG Knob on the GMC 307.

Or

- 1) Press the Knob to display the Menu.
- 2) Select **Heading** or **Track** and use the Knob to change the Selected Heading or Track.

### Syncing to the current heading or ground track:

Press the HDG Knob on the GMC 307.

Or

- 1) Press the Knob to display the Menu.
- 2) Select **Heading** or **Track** and press and hold the Knob to sync the selected heading or ground track to the current heading or ground track.

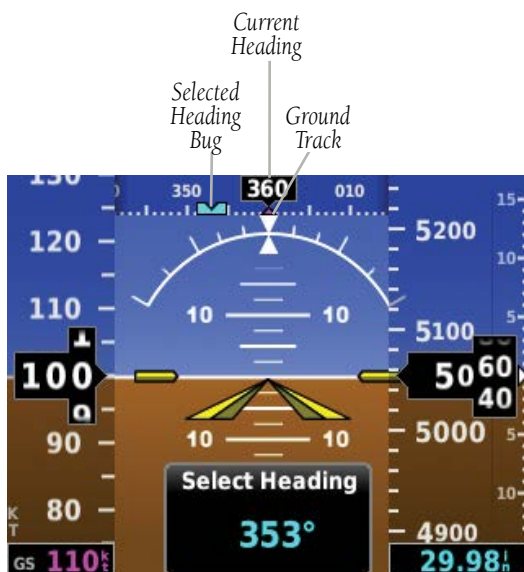


Figure 2-12 PFD Page - Selected Heading



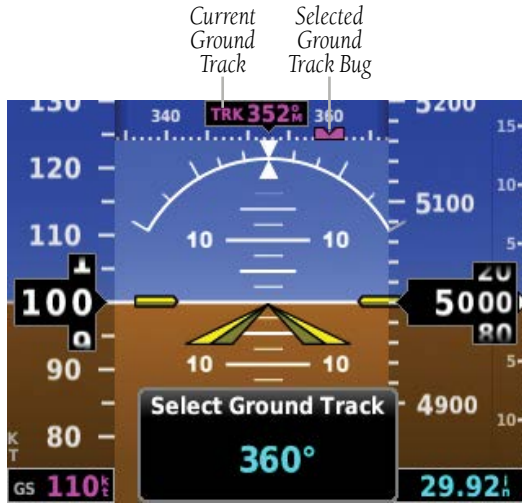


Figure 2-13 PFD Page - Selected Ground Track

### 2.1.6 VERTICAL SPEED INDICATOR (VSI)

The Vertical Speed Indicator displays the aircraft vertical speed using a non-moving tape with minor tick marks every 100 feet. The current vertical speed is displayed using a white arrow along the tape. From the Air Data Page in configuration mode, the Vertical Speed Indicator can be configured to display  $\pm 1500$  fpm,  $\pm 2000$  fpm, or  $\pm 3000$  fpm (refer to the Installation Manual section for more information).

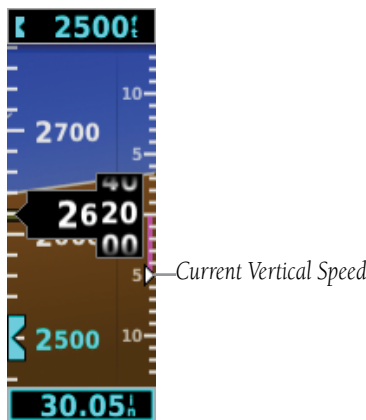


Figure 2-14 Vertical Speed Indicator

## 2.1.7 PFD PITCH ATTITUDE OFFSET



**NOTE:** PFD Pitch Attitude Offset can be configured as disabled in configuration mode.

The Pitch attitude offset function allows the yellow aircraft symbol on the attitude indicator to be adjusted up or down much like the aircraft on a mechanical attitude indicator. The pitch attitude can be adjusted as much as  $\pm 5^\circ$ . The pitch offset is synchronized between the G5 and the other displays in a G3X/G3X Touch system. This function can be disabled in configuration mode.

### Changing the PFD pitch attitude offset:

- 1) From the PFD Page, press the Knob to display the Menu.
- 2) Select **Pitch** and use the Knob to select the desired Pitch Offset.

### Centering the PFD pitch attitude offset:

- 1) From the PFD Page, press the **Knob** to display the Menu.
- 2) Select **Pitch** and press and hold the Knob to center the Pitch Offset.

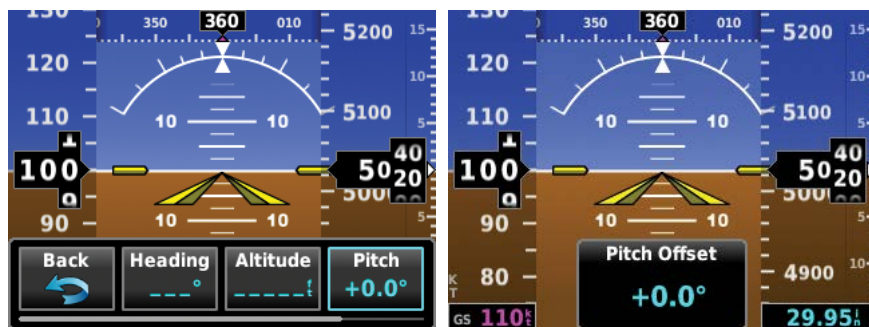





Figure 2-15 Pitch Offset

## 2.1.8 BATTERY STATUS INDICATOR

The current charge level of the battery is indicated by the filled-in portion of the battery icon. The battery icon turns yellow or red to indicate a low-battery condition.




<b>3:15</b> 	<b>41%-100%</b>
<b>1:31</b> 	<b>21%-40%</b>
<b>0:38</b> 	<b>0%-20%</b>

When the G5 is powered by the battery, the estimated time until the battery is empty is displayed. Otherwise, the current charge level of the battery in percent is displayed as a numeric value.

When the G5 is connected to external power and the battery is being charged, a lightning bolt symbol appears over the battery icon.



Other battery indications:

- 
Battery charger hardware fault, or temperature too high/low to safely charge the battery. The system is running on external power but cannot charge the battery.
- 
Battery fault.
- 
Battery is not present (appears only when the battery status field has been configured to always appear).

## 2.2 HSI PAGE



**NOTE:** The HSI Page can be configured as disabled in configuration mode.



- |                            |                                    |                                     |
|----------------------------|------------------------------------|-------------------------------------|
| ① Distance To Waypoint     | ⑥ Rotating Compass Rose            | ⑪ GPS CDI Scale                     |
| ② Battery Status Indicator | ⑦ Ground Speed                     | ⑫ Selected Heading/Ground Track Bug |
| ③ Navigation Source        | ⑧ Selected Heading or Ground Track | ⑬ Current Heading/Ground Track      |
| ④ Aircraft Symbol          | ⑨ OBS Annunciator                  | ⑭ Current Track                     |
| ⑤ Navigator Messages       | ⑩ Course Deviation Indicator (CDI) |                                     |

Figure 2-16 Horizontal Situation Indicator (HSI)

Table 2-1 Annunciations

3 Nav Source Annunciations				11 GPS CDI Scale Annunciations		
GPS/ GPS1/ GPS2	VLOC/	VOR/	LOC/	LP	LPV	LNAV
	VLOC1/	VOR1/	LOC1/	LNAV/VNAV	LNAV+V	APR
	VLOC2	VOR2	LOC2	TERM	ENR	OCN
				VFR (0.25nm, 1.25nm, 5.00nm)		
5 Navigator Messages Annunciations						
LOI	Loss of GPS Integrity			MSG	Pending Nav Message	
DR	GPS Dead-Reckoning Mode			WPT	Waypoint Arrival	



**NOTE:** The VFR CDI Scale is displayed when the G5 is connected to a GPS navigator via RS-232 only, or if ARINC 429 GPS navigation data is unavailable.

### 2.2.1 HORIZONTAL SITUATION INDICATOR (HSI)

The Horizontal Situation Indicator (HSI) on the HSI Page displays a rotating compass card in a heading-up orientation. Letters indicate the cardinal points and numeric labels occur every 30°. Major tick marks are at 10° intervals and minor tick marks at 5° intervals. The current track is represented on the HSI by magenta triangle and a dashed line. The HSI also presents course deviation, bearing, and navigation source information.

#### Displaying the HSI page from the PFD page:

- 1) From the PFD Page press the Knob to display the Menu.
- 2) Select HSI.

### 2.2.1.1 BEARING POINTER

A bearing pointer can be displayed on the HSI for NAV (VOR) and GPS sources. The bearing pointer is light blue. The bearing pointer never overrides the CDI and is visually separated from the CDI by a white ring (shown when the bearing pointer is selected but not necessarily visible due to data unavailability).



Figure 2-17 HSI Page with Bearing Pointer

#### Enabling/disabling the bearing pointer:

- 1) From the HSI Page, press the **Knob** to display the Menu.
- 2) Turn the **Knob** to highlight **Bearing Pointer**.
- 3) Press the **Knob** to enable or disable the Bearing Pointer.



Figure 2-18 Bearing Pointer Menu Option

### 2.2.1.2 COURSE DEVIATION INDICATOR (CDI)

The HSI contains a Course Deviation Indicator (CDI) with a Course Pointer. The course pointer (GPS or VLOC) points in the direction of the selected course.

The Course Deviation Indicator (CDI) moves left or right from the course pointer along a lateral deviation scale to display aircraft position relative to the course. If the course deviation data is not valid, the CDI is not displayed.

The CDI is capable of displaying multiple sources of navigation (GPS, VLOC, or both) depending on the external navigator(s) configured (refer to the G5 Installation Manual Section for more information). Color indicates the current navigation source: magenta (for GPS) or green (for VOR and LOC). The full-scale limits for the CDI are defined by a GPS-derived distance when coupled to GPS. When coupled to a VOR or localizer (LOC), the CDI has the same angular limits as a mechanical CDI.

## 2.2.2 HEADING/GROUND TRACK (HSI PAGE)

The Selected Heading or Ground Track is shown to the right of the HSI. The light blue bug (heading) or magenta bug (ground track) on the compass rose corresponds to the Selected Heading or Ground Track.



**NOTE:** *Heading is displayed if magnetometer data is available from a magnetometer via the CAN network. Otherwise, Ground Track is displayed.*

### Adjusting the selected heading or ground track from the HSI page:

Use the HDG Knob on the GMC 307.

**Or**

From the HSI Page, turn the Knob to adjust the selected heading or ground track.

### Syncing to the current heading or ground track from the HSI page:

Press the HDG Knob on the GMC 307.

**Or**

From the HSI Page, press and hold the Knob to sync to the current heading or ground track.



## 2.3 NAVIGATION

A G5 installed as part of a G3X system with multiple navigation sources will only display data from the #1 navigation source. If the navigation source is a GNS/GTN unit, both GPS and VLOC data can be displayed. Displayed navigation information is also dependent upon the selection on the navigation configuration page.

**Table 2-2 Navigation Data Functions**

Installation Type Setting	Navigation Data Behavior
G3X System Backup (with Navigation Data configuration mode set to 'Auto')	<p>Displays navigation data from the external navigator selected on the G3X PFD. Navigation data from the G3X internal flight plan is not displayed on the G5.</p> <p>If multiple navigation sources are configured and no G3X displays are present, the G5 can select which source is displayed.</p>
G3X System Backup (with Navigation Data configuration mode set to 'Always Display')	Always displays navigation data from navigation source #1. This configuration is only applicable when a single external navigator is configured.
	Displays navigation data only when the navigation data source selected on the G3X PFD is the same as the navigation data available to the G5. (If no G3X displays are present, this will function as if Navigation Data is set to Always)
Standalone Instrument	Always displays navigation data. If multiple navigation sources are configured, the G5 can select which source is displayed.

### 2.3.1 COURSE DEVIATION INDICATOR (CDI)

The PFD Page displays the Course Deviation Indicator (CDI) below the slip/skid indicator. The HSI Page displays the CDI on the Horizontal Situation Indicator.

The Course Deviation Indicator (CDI) move left or right along a lateral deviation scale to display the aircraft position relative to the course. If the course deviation data is not valid, the CDI is not displayed.

The CDI is capable of displaying multiple sources of navigation (GPS, VLOC, or both) depending on the external navigator(s) configured (refer to the G5 Installation Manual Section for more information). Color indicates the current navigation source: magenta (for GPS) or green (for VOR and LOC). The full-scale limits for the CDI are defined by a GPS-derived distance when coupled to GPS. When coupled to a VOR or localizer (LOC), the CDI has the same angular limits as a mechanical CDI.



Figure 2-19 Course Deviation Indicator (PFD Page)



Figure 2-20 Course Deviation Indicator (HSI Page)

**Changing the navigation source on the external navigator (GPS, VOR, LOC, or VLOC):**

Use the associated external navigator to toggle between GPS and VOR/LOC source types. Refer to the appropriate external navigator Pilot's Guide for more information.

**Changing the navigation source on the G5 (GPS, VOR, LOC, or VLOC):**

Refer to the G5 Installation Manual for information on configuring multiple navigation sources.

- 1) From the PFD Page, press the Knob to display the Menu.
- 2) Turn the knob to select **Source**.
- 3) Press the knob to cycle through available navigation sources.



Figure 2-21 Navigation 'Source' Menu Option (PFD Page)

## 2.3.2 VERTICAL DEVIATION INDICATOR AND VNAV INDICATOR



**NOTE:** An external navigator (i.e. GTN/GNS, GNC 255, or SL30 Nav/Comm Transceiver) must be configured to receive glideslope and/or glidepath vertical deviation indications.

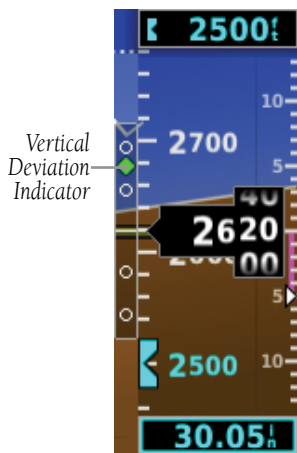


Figure 2-22 Vertical Deviation Indicator Position (PFD Page)

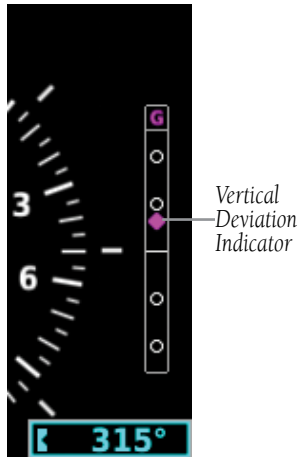


Figure 2-23 Vertical Deviation Indicator Position (HSI Page)

### 2.3.2.1 GLIDESLOPE - ILS SOURCE

The Vertical Deviation (Glideslope) Indicator (VDI) appears to the left of the altimeter whenever an ILS frequency is tuned in the active NAV field of an external navigator. A green diamond acts as the VDI Indicator, like a glideslope needle on a conventional indicator. If a localizer frequency is tuned and there is no glideslope signal, "NO GS" is annunciated.

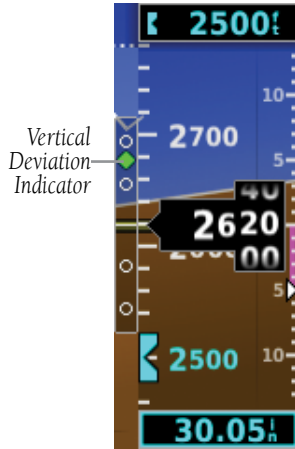


Figure 2-24 Vertical Deviation Indicator (Glideslope-ILS Source)

### 2.3.2.2 GLIDEPATH - GPS SOURCE

The Vertical Deviation (Glidepath) Indicator (VDI) also appears to the left of the altimeter during a GPS approach. The glidepath is analogous to the glideslope for GPS approaches supporting WAAS vertical guidance (LNAV+V, L/VNAV, LPV). The Glidepath Indicator appears on the G5 as a magenta diamond. If the approach type downgrades past the final approach fix (FAF), "NO GP" is annunciated.

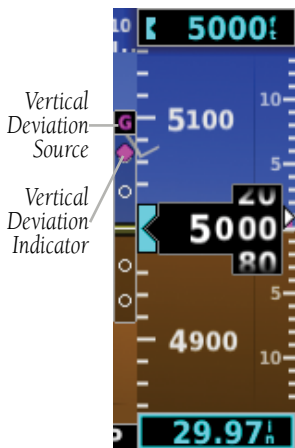


Figure 2-25 Vertical Deviation Indicator (Glidepath-GPS Source)

### 2.3.2.3 VNAV INDICATOR



**NOTE:** VNAV deviation is only displayed when the G5 is receiving NMEA RS-232 data from a portable GPS.

The magenta chevron (VNAV Indicator) to the left of the altimeter on the Vertical Deviation Scale displays the VNAV profile.

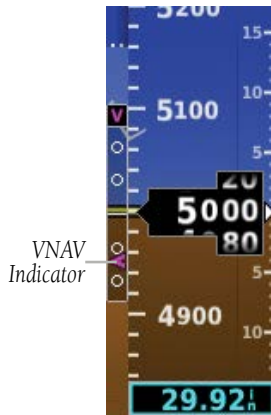


Figure 2-26 VNAV Indicator

### 2.3.3 COURSE SELECTION

When the G5 is receiving VOR, LOC, or GPS data, a **Course** menu option is displayed.

#### Setting the course for a VOR or localizer:

- 1) From the PFD Page, press the Knob to display the Menu.
- 2) Select **Course** and use the Knob to adjust the course.



Figure 2-27 VLOC Course on PFD Page

#### Setting the OBS course:

- 1) From the PFD Page, press the Knob to display the Menu.
- 2) Select **Course** and use the Knob to adjust the course.



## SECTION 3 AUTOMATIC FLIGHT CONTROL SYSTEM (OPTIONAL)



**NOTE:** The approved Pilot's Operating Handbook (POH) always supersedes the information in this Pilot's Guide.



**NOTE:** Refer to the approved Pilot's Operating Handbook (POH) for emergency procedures.



**NOTE:** A GMC controller is required for G5 AFCS functionality.

### 3.1 AFCS SYSTEM ARCHITECTURE

An Automatic Flight Control System (AFCS) is typically comprised of two major components: A Flight Director (FD) and Autopilot servos. The Flight Director provides pitch and roll commands to the autopilot servos. These pitch and roll commands are displayed on the PFD Page as Command Bars. When the Flight Director is active the pitch and roll commands can be hand-flown by the pilot or when coupled with the autopilot, the autopilot servos drive the flight controls to follow the commands issued by the Flight Director. The Flight Director operates independently of the autopilot servos, but in most cases the autopilot servos can not operate independent of the Flight Director.

#### 3.1.1 AUTOPILOT AND YAW DAMPER OPERATION

The autopilot and optional yaw damper operate the flight control surface servos to provide automatic flight control. The autopilot controls the aircraft pitch and roll attitudes following commands received from the flight director. Pitch, Roll, and Yaw (if installed) autotrim provides trim commands to each servo to relieve any sustained effort required by the servo(s). Autopilot operation is independent of the optional yaw damper.

The optional yaw damper reduces Dutch roll tendencies, coordinates turns, and provides a steady force to maintain directional trim. It can operate independently of the autopilot and may be used during normal hand-flight maneuvers. Yaw rate commands are limited to 6 deg/sec by the yaw damper.

### 3.1.2 FLIGHT CONTROL

---

Pitch and roll commands are provided to the servos based on the active flight director modes. Yaw commands are provided by the yaw servo. Servo motor control limits the maximum servo speed and torque. This allows the servos to be overridden in case of an emergency.

### 3.1.3 PITCH AXIS AND TRIM

---

The autopilot pitch axis uses pitch rate to stabilize the aircraft pitch attitude during flight director maneuvers. Flight director pitch commands are rate and attitude-limited, combined with pitch damper control, and sent to the pitch servo motor. The pitch servo measures the output effort (torque) and optionally provides this signal to the pitch trim motor. The pitch servo commands the pitch trim motor to reduce the average pitch servo effort.

### 3.1.4 ROLL AXIS

---

The autopilot roll axis uses roll rate to stabilize aircraft roll attitude during flight director maneuvers. The flight director roll commands are rate- and attitude-limited, combined with roll damper control, and sent to the roll servo motor.

### 3.1.5 YAW AXIS

---

The yaw damper uses yaw rate and roll attitude to dampen the aircraft's natural Dutch roll response. It also uses lateral acceleration to coordinate turns and reduce or eliminate the need for the pilot to use rudder pedal force to maintain coordinated flight during climbs and descents.

### 3.1.6 CONTROL WHEEL STEERING (CWS) (OPTIONAL)

Control Wheel Steering allows the aircraft to be hand-flown without disengaging the AFCS. Press and hold the autopilot CWS Button (if equipped) to temporarily disengage the pitch and roll servos from the flight control surfaces and hand-fly the aircraft. The G5 autopilot control is synchronized to the aircraft attitude during Control Wheel Steering. The green 'AP' annunciation is temporarily replaced by a white 'CW' for the duration of Control Wheel Steering maneuvers.

In most scenarios, releasing the CWS Button reengages the Autopilot with a new reference. Refer to (Vertical Modes) and (Lateral Modes) for Control Wheel Steering behavior in each mode.

### 3.1.7 G5 AFCS STATUS BOX

The AFCS status box displays Autopilot (AP) and Flight Director (FD) mode annunciations on the PFD Page.

Autopilot (AP) status is displayed middle of the G5 Autopilot Status Box. Lateral modes are displayed on the left, and vertical modes are displayed on the right. Armed modes are displayed in white and active in green.



Figure 3-1 Autopilot Status Box

### 3.1.8 G5 AFCS CONFIGURATION

The G5 can be configured as a standalone unit or as a backup unit for a G3X or G3X Touch system.

When configured as a standalone unit with a GMC controller and GSA servos:

- The G5 supports the following modes: LVL, PIT, ROL, HDG (for installations with a magnetometer), TRK (for installations without a magnetometer), GPS, VS, IAS, ALT, ALTS, GP, and VNAV.
- GP mode requires ARINC 429 data from an IFR navigator.
- VNAV mode requires RS-232 data from a portable GPS.

When configured as a backup unit for a G3X or G3X Touch system:

- The G5 supports the following modes: LVL, PIT, ROL, HDG, TRK, GPS, VS, IAS, ALT, ALTS, TO, GA, and GP.
- GP mode requires ARINC 429 data from an IFR navigator.
- TRK mode is selected using the HDG Button on the GMC and is only available when magnetic heading is unavailable.

### 3.1.9 AFCS OPERATION



**NOTE:** When the G5 is configured as part of a G3X/G3X Touch system, the G5 can be used to drive the autopilot and flight director only when all GDUs are removed from the network.

AFCS functionality is distributed across the following Line Replaceable Units (LRUs):

- GMC 305/307 AFCS Mode Control Unit
- GSA 28 AFCS Pitch/Roll/Yaw Damper (optional) servos.

The AFCS system can be divided into these main operating functions:

• **Flight Director (FD)** — Flight director commands are displayed on the display. The flight director provides:

- Command Bars showing pitch/roll guidance
- Vertical/lateral mode selection and processing
- Autopilot communication

- **Autopilot (AP)** — Autopilot operation occurs within the pitch and roll servos. It also provides servo monitoring and automatic flight control in response to flight director steering commands, Air Data and Attitude and Heading Reference System (ADAHRS) attitude, rate information, and airspeed.

- **Yaw Damper (YD)** — The yaw servo (optional), is self-monitoring and provides Dutch roll damping and turn coordination in response to yaw rate, roll angle, lateral acceleration, and airspeed. If installed the YD comes on when the autopilot is engaged and stays on after disengaging the autopilot. The YD can be turned on/off independent of the autopilot using the **YD Key**.

- **Manual Electric Trim (MET)** — Manual electric trim may provide trim capability for any properly configured axis (pitch, roll, or yaw) when the autopilot is not engaged.



**NOTE:** Refer to the G5 Installation Manual Section for information on installing and configuring the G5 Integrated Autopilot Interface.

### 3.1.10 AFCS PRE-FLIGHT ACTIONS (STANDALONE INSTALLATION)

To ensure that the Automatic Flight Control System (AFCS) is operating properly prior to flight, perform the following Garmin recommended preflight checks.

**Before takeoff checklist:**

- 1) Autopilot - ENGAGE (using AP/CWS button, or **AP** button on mode controller)
- 2) Flight controls - CHECK (verify autopilot can be overpowered in both pitch and roll)
- 3) **AP DISC** button - PRESS (verify autopilot disengages)
- 4) Yaw damper - OFF (if installed) (verify yaw damper disengages)
- 5) Flight director - SET FOR TAKEOFF (select IAS or VS mode or push FD Button to turn off the Flight Director)
- 6) Flight controls - CHECK (verify autopilot servos are disengaged from pitch, roll, and yaw controls, and all controls move freely)
- 7) Elevator trim control - SET FOR TAKEOFF

## 3.1.11 AFCS CONTROLS

### 3.1.11.1 GMC 305/307 AFCS CONTROLS

The GMC 305/307 AFCS Control Units have the following controls:

**Table 3-1 AFCS Controls**

①	<b>HDG Key</b>	Selects/deselects Heading Select Mode. (Used for TRK Mode in installations without a magnetometer)
②	<b>NAV Key</b>	Selects/deselects Navigation Mode. Cancels GP Mode if GPS Mode is either active or armed.
③	<b>AP Key</b>	Engages/disengages the autopilot
④	<b>LVL (Level) Key</b>	Engages the autopilot (if the autopilot is disengaged) in level vertical and lateral modes
⑤	<b>NOSE UP/DN Wheel</b>	Adjusts the vertical mode reference in Pitch Hold, Vertical Speed, Indicated Airspeed, and Altitude Hold modes
⑥	<b>IAS Key</b>	Selects/deselects Indicated Airspeed Mode
⑦	<b>ALT Key</b>	Selects/deselects Altitude Hold Mode
⑧	<b>VNV Key</b>	Selects/deselects Vertical Path Tracking Mode for Vertical Navigation flight control
⑨	<b>VS Key</b>	Selects/deselects Vertical Speed Mode
⑩	<b>YD Key</b> (if installed)	Engages/disengages the yaw damper
⑪	<b>FD Key</b>	Activates/deactivates the flight director only Pressing once turns on the director in the default vertical and lateral modes. Pressing again deactivates the flight director and removes the Command Bars. If the autopilot is engaged, the key is disabled.
⑫	<b>APR Key</b>	Selects/deselects Approach Mode (GP mode only)
⑬	<b>HDG Knob</b>	Selects the desired Heading*
⑭	<b>ALT SEL Knob</b>	Selects the desired Altitude setting*

\*GMC 307 only

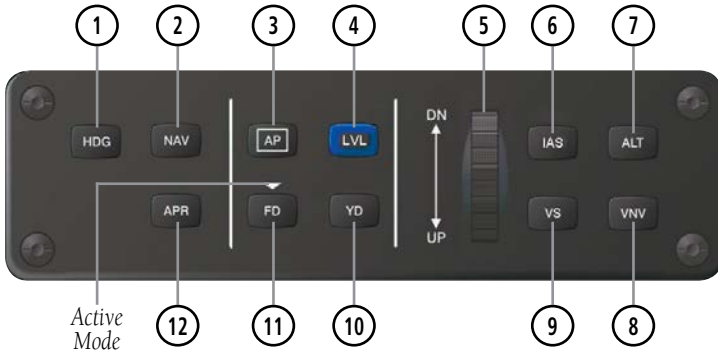


Figure 3-2 GMC 305 AFCS Control Unit

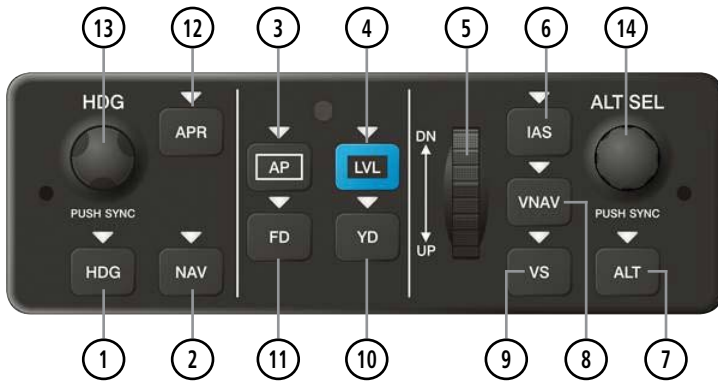


Figure 3-3 GMC 307 AFCS Control Unit

The following AFCS controls are located separately from the G5 and GMC 305/307 AFCS Control Unit:

**Table 3-2 Other AFCS Controls**

**CWS/AP DISC Button  
(Autopilot Disconnect)**

An AP DISC/CWS Button is located on the pilot's control stick. This button combines the functions of Autopilot Disconnect and Control Wheel Steering. (Note: the Control Wheel Steering function can be disabled in configuration mode, which causes the button to perform the Autopilot Disconnect function only)

Press and release the AP DISC/CWS Button to disengage the autopilot.

Pressing and holding the AP DISC/CWS Button when the autopilot is engaged will temporarily disengage the pitch and roll servos and interrupt autotrim operation. The pilot can then hand-fly the aircraft to a new attitude and release the AP DISC/CWS button to re-engage the autopilot servos and synchronize the flight director to the aircraft's new attitude. The ability to use Control Wheel Steering may be disabled in configuration mode if desired. If the configuration supports it, pressing and holding the AP DISC/CWS button while the autopilot is not engaged will cause the autopilot to engage. If the flight director was previously off, the default FD modes (PIT and ROL) will be selected. The ability to engage the autopilot using the CWS button may be disabled in configuration mode if desired.

**TO/GA Button  
(Takeoff/Go Around)**

Selects flight director Takeoff or Go Around Mode (only applies to a G5 installed as part of a G3X/G3X Touch system).

**MET Switch  
(Manual Electric Trim)**

Used to command manual electric trim for any properly configured servo (pitch, roll, or yaw).



### 3.1.11.2 ENGAGING THE AUTOPILOT

Selection of the control listed below (when the Autopilot is not engaged) will engage the Autopilot with the listed lateral and vertical modes (some modes may require an external navigator):

Table 3-3 Engaging the Autopilot

Control	Modes Selected			
	Lateral		Vertical	
	Mode/Annunciation		Mode/Annunciation	
CWS Button (if equipped) (press and hold)	Roll Hold	ROL	Pitch Hold	PIT
<b>HDG</b>	Heading	HDG	Pitch Hold	PIT
<b>NAV</b>	Navigation	GPS	Pitch Hold	PIT
<b>ALT</b>	Roll Hold	ROL	Altitude Hold	ALT
<b>VS</b>	Roll Hold	ROL	Vertical Speed	VS
<b>VNAV</b>	Roll Hold	ROL	Vertical Navigation	VNAV
<b>APPR</b>	Approach	GPS	Glidepath	GP

Navigation and Approach Modes must have an active GPS course to activate the autopilot.

#### 3.1.11.2.1 ENGAGING THE AUTOPILOT (GMC 305/307)

An initial press of the **AP** Key on the GMC 305/307 will activate the Flight Director and engage the autopilot in the default PIT and ROL modes.

### 3.1.11.3 DISENGAGING THE AUTOPILOT

The Autopilot is manually disengaged by pressing the autopilot disconnect button on the control stick or yoke or by pressing the **AP** Key on the GMC 305/307. Manual disengagement is indicated by a five-second flashing yellow 'AP' annunciation. Cancel the aural alert by pressing and releasing the **AP/CWS** Button again.

Automatic disengagement is indicated by a flashing red 'AP' annunciation. Automatic disengagement occurs due to:

- System failure
- Invalid sensor data
- Inability to compute default autopilot modes
- Detection of a GDU display on the CAN network (when installed as part of a G3X/G3X Touch system).

#### 3.1.11.3.1 DISENGAGING THE AUTOPILOT WHEN A MALFUNCTION IS SUSPECTED

If an autopilot failure or trim failure is suspected to have occurred, perform the following steps:

- 1) Firmly grasp the control wheel.
- 2) Press and hold the AP DISC Switch. The autopilot will disconnect and power is removed from the trim motor. Power is also removed from all primary servo motors and engaged solenoids. Note the visual alerting indicating autopilot disconnect.
- 3) Retrim the aircraft as needed. Substantial trim adjustment may be needed.
- 4) Pull the appropriate circuit breaker(s) to electrically isolate the servo and solenoid components.
- 5) Release the AP DISC Switch.

### 3.1.11.3.2 OVERPOWERING AUTOPILOT SERVOS

In the context of this discussion, “overpowering” refers to any pressure or force applied to the pitch controls when the autopilot is engaged. A small amount of pressure or force on the pitch controls can cause the autopilot automatic trim to run to an out-of-trim condition. Therefore, any application of pressure or force to the controls should be avoided when the autopilot is engaged.

Overpowering the autopilot during flight will cause the autopilot’s automatic trim to run, resulting in an out-of-trim condition or cause the trim to hit the stop if the action is prolonged. In this case, larger than anticipated control forces may be required after the autopilot is disengaged.

The following steps should be added to the preflight check:

- 1) Check for proper autopilot operation and ensure the autopilot can be overpowered.
- 2) Note the forces required to overpower the autopilot servo clutches.

### 3.1.12 FLIGHT DIRECTOR OPERATION



**NOTE:** Refer to the *Installation Manual* section for AFCS setup information.

The flight director function provides pitch and roll commands to the pilot and autopilot, which are displayed on the PFD Page. With the flight director active, the aircraft can be hand-flown to follow the path shown by the Command Bars. The Flight Director has the following maximum commands: pitch (-15°, +20°) and roll (30°) angles.

### 3.1.12.1 ACTIVATING THE FLIGHT DIRECTOR

An initial press of a key listed in the table below (when the flight director is not active) activates the flight director in the listed modes. The flight director may be turned off and the Command Bars removed from the display by pressing the **FD** Key again. The **FD** Key is disabled when the autopilot is engaged.

Table 3-4 Flight Director Activation (GMC 305/307)

Control Pressed	Modes Selected			
	Lateral		Vertical	
<b>FD</b> Key	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
<b>AP</b> Key	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
<b>TO/GA</b> Button	Takeoff (on-ground) Go Around (in-air)	TO GA	Takeoff (on-ground) Go Around (in-air)	TO GA
<b>ALT</b> Key	Roll Hold (default)	ROL	Altitude Hold	ALT
<b>VS</b> Key	Roll Hold (default)	ROL	Vertical Speed	VS
<b>VNV</b> Key	Roll Hold (default)	ROL	Vertical Navigation*	VNV
<b>IAS</b> Key	Roll Hold (default)	ROL	Indicated Airspeed	IAS
<b>APR</b> Key	Approach**	GPS	Pitch Hold (default)	PIT
<b>NAV</b> Key	Navigation**	GPS	Pitch Hold (default)	PIT
<b>HDG</b> Key	Heading Select	HDG***	Pitch Hold (default)	PIT
<b>LVL</b> Key	Level Hold	LVL	Level Hold	LVL

\*Must be receiving VNAV data from a portable GPS via RS-232 before VNV Key press activates flight director.

\*\*The selected navigation receiver must have an active GPS course before NAV or APR Key press activates flight director.

\*\*\* HDG mode is only available when magnetic heading data is being received from an ADAHRS unit, when the G5 is installed as a backup unit in a G3X/G3X Touch system.

### 3.1.12.2 FLIGHT DIRECTOR MODES

Flight director modes are normally selected independently for the pitch and roll axes. Unless otherwise specified, all mode keys are alternate action (i.e., press on, press off). In the absence of specific mode selection, the flight director reverts to the default pitch and/or roll modes.

Armed modes are annunciated in white and active in green in the AFCS Status Box. Under normal operation, when the control for the active flight director mode is pressed, the flight director reverts to the default mode(s) for the axis(es). Automatic transition from armed to active mode is indicated by the white armed mode annunciation moving to the green active mode field and flashing for 10 seconds.

If the information required to compute a flight director mode becomes invalid or unavailable, the flight director automatically reverts to the default mode for that axis. A flashing yellow mode annunciation and annunciator light indicate loss of sensor or navigation data required to compute commands. When such a loss occurs, the system automatically begins to roll the wings level (enters Roll Hold Mode) or maintain the pitch angle (enters Pitch Hold Mode), depending on the affected axis. The flashing annunciation stops when the affected mode key is pressed or another mode for the axis is selected. If after 10 seconds no action is taken, the flashing annunciation stops.

The flight director is automatically disabled if the attitude information required to compute the default flight director modes becomes invalid or unavailable.

### 3.1.12.3 COMMAND BARS

Upon activation of the flight director, Command Bars are displayed in magenta on the PFD Page. If the aircraft is being flown by hand, the command bars are displayed hollow. The Command Bars do not override the Aircraft Symbol. The Command Bars move together vertically to indicate pitch commands and bank left or right to indicate roll commands.

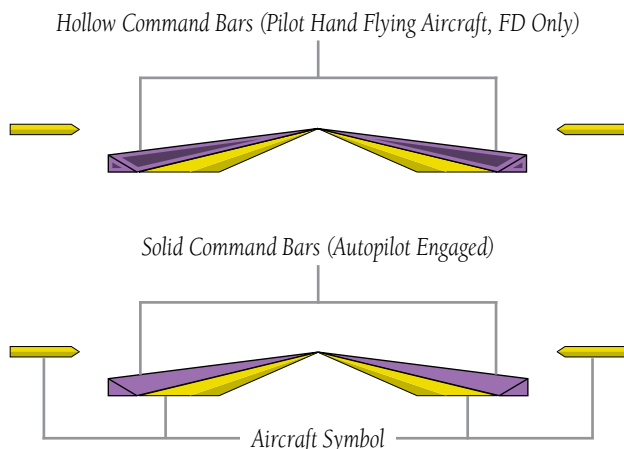


Figure 3-4 Command Bars (Single Cue Flight Director)

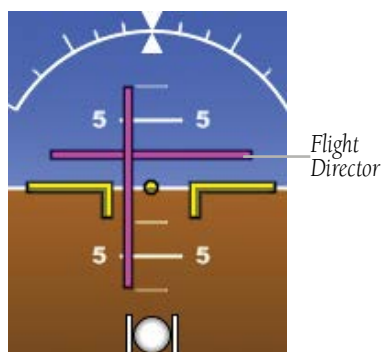


Figure 3-5 Flight Director (Dual Cue)

If the attitude information being sent to the flight director becomes invalid or unavailable, the Command Bars are removed from the display.

### 3.1.12.4 FLIGHT DIRECTOR ALTITUDE CONTROLS



**CAUTION:** The following settings change the Flight Director operation. Before changing these settings become familiar with how these changes affect the use of the Flight Director.



**NOTE:** Refer to the Installation Manual section for information on changing the Flight Director Altitude Controls.

The Flight Director Altitude Controls allow the user to select **Normal** or **Simplified**. When Altitude Controls are set to **Normal**, the following additional selections appear:

- **ALT Mode User Select Action:** Determines the behavior of the Flight Director when the user selects Altitude Hold Mode by pressing the ALT key on the GMC. The following two options are available:
  - **Normal:** The Flight Director enters Altitude Hold (ALT) Mode.
  - **Sync Selected Altitude:** The Flight Director enters Altitude Hold (ALT) Mode and the Selected Altitude (Altitude Bug) changes to the current aircraft altitude.
- **ALT Mode User Up/Down Action:** Determines the behavior of the Flight Director when the Flight Director is in Altitude Hold (ALT) Mode and the user moves the pitch wheel on the GMC. The following two options are available:
  - **Normal:** Adjusts the Target Altitude in 10-foot increments, up to  $\pm 200$  feet from the original Target Altitude.
  - **Select VS Mode:** The Flight Director changes from Altitude Hold (ALT) Mode to Vertical Speed (VS) Mode and initiates a climb or descent. Subsequent vertical speed adjustments are in increments of 100 fpm. The Default Vertical Speed that is used for the initial climb or descent is set using a pair of fields that appear when **Select VS Mode** is selected.

When Altitude Controls are set to **Simplified**, Altitude Hold (ALT) Mode behavior differs in the following ways:



**NOTE:** With Altitude Controls set to **Simplified**, the user will not be able to pre-select a new altitude while ALT mode is already active.

- Selecting Altitude Hold (ALT) Mode causes the Selected Altitude (Altitude Bug) to change to the current aircraft altitude.
- There is no longer a difference between the Selected Altitude (Altitude Bug) and the Target Altitude for Altitude Hold (ALT) Mode.
- After Altitude Hold (ALT) Mode captures the Selected Altitude, subsequent changes to the Selected Altitude will cause ALT Mode to climb or descend towards the new Selected Altitude.
  - Subsequent vertical speed adjustments are in increments of 100 fpm, with the exception that the user cannot adjust the target vertical speed to a value that would cause the aircraft to fly away from the Selected Altitude.
  - Unlike **Select VS Mode** described previously, this option does not switch to VS mode. Instead, it displays a vertical speed bug.
  - The initial vertical speed used for climb or descent towards the new altitude is determined by the Default Vertical Speed fields as described previously.
- When Altitude Hold (ALT) Mode has captured the Selected Altitude, the vertical speed bug is removed and vertical speed adjustments have no effect.

### 3.1.13 VERTICAL MODES

The table lists the vertical modes with their corresponding controls and annunciations. The mode reference is displayed next to the active mode annunciation for Altitude Hold, Vertical Speed, and Indicated Airspeed modes. The **NOSE UP/DN** Wheel can be used to change the vertical mode reference while operating under Pitch Hold, Vertical Speed, Indicated Airspeed, or Altitude Hold modes. Increments of change of values for each of these references using the **NOSE UP/DN** Wheel, are also listed in the table.



**Table 3-5 Flight Director Vertical Modes**

Vertical Mode	Description	Control	Annunciation	Reference Change Increment
Pitch Hold	Holds the current aircraft pitch attitude; may be used to climb/descend to the Selected Altitude	(default)	PIT	0.5°
Selected Altitude Capture	Captures the Selected Altitude	*	ALTS	10 ft
Altitude Hold	Holds the current Altitude	<b>ALT</b> Key	ALT	
Vertical Speed	Maintains the current aircraft vertical speed; may be used to climb/descend to the Selected Altitude	<b>VS</b> Key	VS	100 fpm
Indicated Airspeed (IAS)	Maintains the current aircraft airspeed in IAS while the aircraft is climbing/descending to the Selected Altitude	<b>IAS</b> Key	IAS	1 kt
Vertical Navigation	Captures and tracks descent legs of an active vertical profile	<b>VNV</b> Key (GMC 305/307)	VNV***	
Glidepath	Captures and tracks the SBAS glidepath on approach	<b>APR</b> Key (GMC 305/307)	GP	
Takeoff	Commands a constant pitch angle and wings level on-ground in preparation for takeoff	<b>GA</b> Button	TO**	
Go Around	Commands a constant pitch angle and wings level in the air		GA**	

\* *ALTS armed automatically when PIT, VS, IAS, or GA active, and under VNAV when Selected Altitude is to be captured instead of VNV Target Altitude*

\*\* *TO and GA modes are only displayed when the G5 is configured as a backup unit in a G3X/G3X Touch system.*

\*\*\* *VNV mode (only available as part of a standalone G5 installation when receiving NMEA RS-232 data from a portable GPS).*

### 3.1.13.1 PITCH HOLD MODE (PIT)

When the flight director is activated (**FD** key pressed) or when the Autopilot is activated, Pitch Hold Mode is selected by default. Pitch Hold Mode is indicated as the active vertical mode by the green 'PIT' annunciation. This mode may be used for climb or descent to the Selected Altitude (shown above the Altimeter), since Selected Altitude Capture Mode is automatically armed when Pitch Hold Mode is activated.

In Pitch Hold Mode, the flight director maintains a constant pitch attitude. The pitch reference is set to the aircraft pitch attitude at the moment of mode selection. If the aircraft pitch attitude exceeds the flight director pitch command limitations, the flight director commands a pitch angle equal to the nose-up/down limit.

#### Changing the pitch reference:

When operating in Pitch Hold Mode, the pitch reference can be adjusted by using the **NOSE UP/DN** Wheel.

Or

Hold the Control Wheel Steering (CWS) Button (if equipped, and the autopilot unit supports CWS), establish the desired pitch attitude, then release the CWS Button.

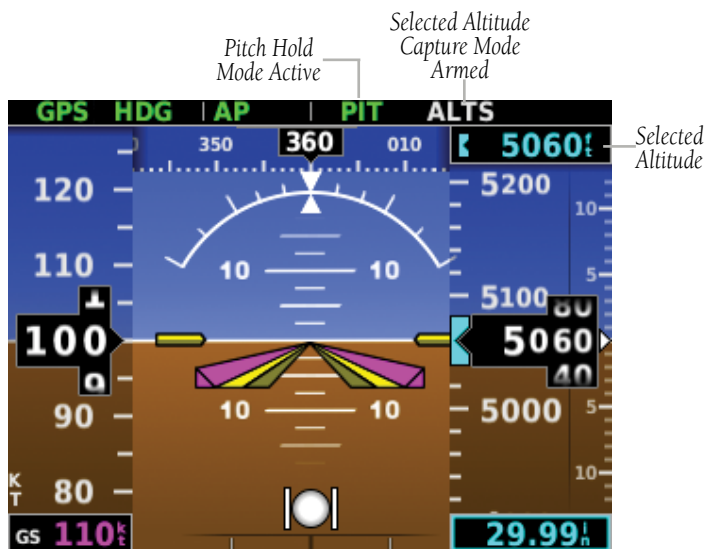


Figure 3-6 Pitch Hold & Selected Altitude Capture Modes

### 3.1.13.2 SELECTED ALTITUDE CAPTURE MODE (ALTS)

Selected Altitude Capture Mode is automatically armed with activation of the following modes:

- Pitch Hold
- Vertical Speed
- Indicated Airspeed
- TO/Go Around
- Vertical Path Tracking

The white 'ALTS' annunciation indicates Selected Altitude Capture Mode is armed.



**Figure 3-7 Selected Altitude Capture Mode (Armed)**

As the aircraft nears the Selected Altitude, the flight director automatically transitions to Selected Altitude Capture Mode with Altitude Hold Mode armed. This automatic transition is indicated by the green 'ALTS' annunciation flashing for up to 10 seconds and the appearance of the white 'ALTS' annunciation.

At 50 feet from the Selected Altitude, the flight director automatically transitions from Selected Altitude Capture to Altitude Hold Mode and holds the reference altitude. As Altitude Hold Mode becomes active, the white 'ALTS' annunciation moves to the active vertical mode field and flashes green for 10 seconds to indicate the automatic transition.

**Setting the selected altitude:**

Use the **ALT SEL Knob** on the GMC 307 to adjust the selected altitude.

**Or**

- 1) Press the Knob to display the Menu.
- 2) Select **Altitude** and use the Knob to change the Selected Altitude.

**Syncing to the current altitude:**

Press the Knob on the GMC 307.

**Or**

- 1) Press the Knob to display the Menu.
- 2) Select **Altitude** and press and hold the Knob to sync the Selected Altitude to the current altitude

Changing the Selected Altitude while Selected Altitude Capture Mode is active causes the autopilot to revert to Pitch Hold Mode with Selected Altitude Capture Mode armed for the new Selected Altitude.

### 3.1.13.3 ALTITUDE HOLD MODE (ALT)

Altitude Hold Mode can be activated by pressing the **ALT** Key; the AFCS maintains the current aircraft altitude (to the nearest 10 feet) as the Altitude Reference. Altitude Hold Mode active is indicated by a green 'ALT' annunciation in the G5 Autopilot Status Box.

Altitude Hold Mode is automatically armed when in Selected Altitude Capture Mode. Selected Altitude Capture Mode automatically transitions to Altitude Hold Mode when within 50 feet of the Selected Altitude. In this case, the Selected Altitude becomes the Altitude Reference.

#### 3.1.13.3.1 CHANGING THE ALTITUDE REFERENCE

When operating in Altitude Hold Mode, the Altitude Reference can be adjusted in the following ways:

- The Altitude Reference can be adjusted up or down in 10-foot increments by rolling the **NOSE UP/DN** Wheel. Using this method, up to 200 feet of altitude change can be commanded. To change the Altitude Reference by more the 200 feet, use the CWS button (if equipped) as described below, or climb/descend using another vertical mode (PIT, VS) to capture the desired Selected Altitude.
- If the aircraft is equipped with a CWS Button, pressing the CWS Button allows the aircraft to be hand-flown to a new Altitude Reference. When the CWS Button is released at the desired altitude, the new altitude is established as the Altitude Reference.



*Altitude Hold  
Mode Active*



Figure 3-8 Altitude Hold Mode

### 3.1.13.4 VERTICAL SPEED MODE (VS)

In Vertical Speed Mode, the flight director acquires and maintains a Vertical Speed Reference. Current aircraft vertical speed (to the nearest 100 fpm) becomes the Vertical Speed Reference at the moment of Vertical Speed Mode activation. This mode may be used for climb or descent to the Selected Altitude (shown above the Altimeter) since Selected Altitude Capture Mode is automatically armed when Vertical Speed Mode is selected.

When Vertical Speed Mode is activated by pressing the **VS** Key, 'VS' is annunciated in green in the Autopilot Status Box. The Vertical Speed Reference is also displayed below the Vertical Speed Indicator. A Vertical Speed Reference Bug corresponding to the Vertical Speed Reference is shown on the indicator.



Figure 3-9 Vertical Speed Reference on PFD Page

### 3.1.13.4.1 CHANGING THE VERTICAL SPEED REFERENCE

The Vertical Speed Reference may be adjusted in the following ways:

- Use the **NOSE UP/DN** Wheel to adjust the Vertical Speed Reference in increments of 100 fpm.
- Press the CWS Button (if equipped) and hand-fly the aircraft to a new Vertical Speed Reference. When the CWS Button is released, the aircraft's vertical speed (to the nearest 100 fpm) is established as the new Vertical Speed Reference.

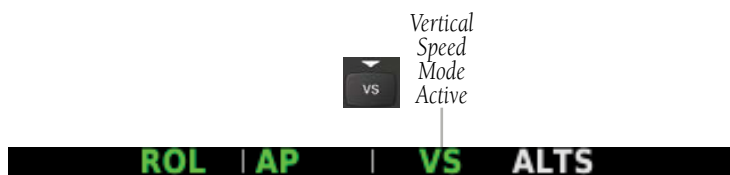


Figure 3-10 Vertical Speed Mode

### 3.1.13.5 INDICATED AIRSPEED MODE (IAS)

Indicated Airspeed Mode is selected by pressing the **IAS** Key on the GMC. This mode acquires and maintains the Airspeed Reference (IAS) while climbing or descending. When Indicated Airspeed Mode is active, the flight director continuously monitors Selected Altitude, airspeed and altitude.

The Airspeed Reference is set to the current airspeed upon mode activation. Indicated Airspeed Mode is indicated by a green 'IAS' annunciation in the Autopilot Status Box. The Airspeed Reference is also displayed as a light blue bug corresponding to the Airspeed Reference along the airspeed tape.

Engine power must be adjusted to allow the autopilot to fly the aircraft at a pitch attitude corresponding to the desired flight profile (climb or descent) while maintaining the Airspeed Reference.

### 3.1.13.5.1 CHANGING THE AIRSPEED REFERENCE

The Airspeed Reference (shown in both the Autopilot Status Box and above the Airspeed Indicator) may be adjusted by using the **NOSE UP/DN** Wheel.

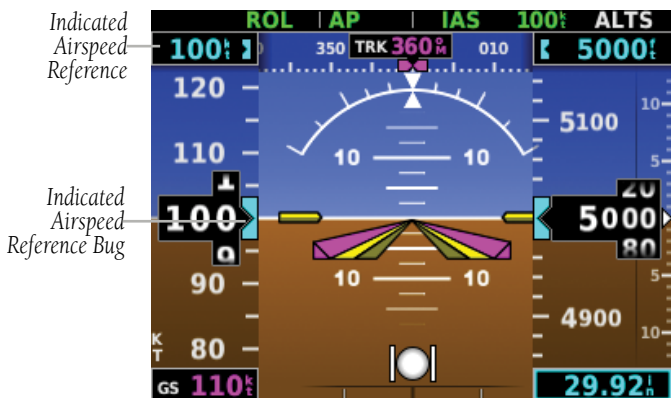


Figure 3-11 Indicated Airspeed Reference on PFD Page

### 3.1.13.6 VERTICAL NAVIGATION MODE (VNV)



**NOTE:** If another vertical mode is touched while VNV Mode is selected, VNV Mode reverts to armed.



**NOTE:** Pressing the CWS Button (if equipped) while VNV Mode is active does not cancel the mode. The autopilot guides the aircraft back to the descent path upon release of the CWS Button.

Vertical Navigation (VNV) Mode is available for enroute/terminal cruise and descent operations any time that VNAV input data is being received.



Figure 3-12 Vertical Navigation Mode

### Activating vertical navigation mode:

- 1) When a flight plan is active, VNAV data is valid, and the **VNV** Key is selected, VNV mode is armed in preparation for descent path capture. 'VNV' is annunciated in white in the G5 Autopilot Status Box.
- 2) When a descent leg is captured (i.e., vertical deviation becomes valid), VNV Mode is activated and tracks the descent profile.
- 3) Level off when approaching the Selected Altitude.

If the altimeter's barometric setting is adjusted while VNV mode is active, the autopilot increases/decreases the descent rate by up to 500 fpm to re-establish the aircraft on the descent path (without commanding a climb). For large changes, it may take several minutes for the aircraft to reestablish on the descent path.

#### 3.1.13.6.1 AUTOMATIC REVERSION TO PITCH HOLD MODE

Several situations can occur while VNV Mode is active which cause the AFCS to revert to Pitch Hold Mode:

- The aircraft does not level off at the selected altitude.
- Vertical deviation exceeds 200 feet during an overspeed condition.
- Vertical deviation becomes invalid (the Deviation Indicator is removed from the PFD Page).

Following a reversion to Pitch Hold Mode, VNV Mode becomes armed to allow for possible profile recapture.



### 3.1.13.7 GLIDEPATH MODE (GP) (WITH EXTERNAL WAAS ENABLED IFR NAVIGATOR ONLY)

Glidepath Mode is used to track a WAAS or other satellite-based augmentation system SBAS generated glidepath. When Glidepath Mode is armed, 'GP' is annunciated in white in the Autopilot Status Box.

#### Selecting glidepath mode:

- 1) **EXTERNAL NAVIGATOR:** Ensure a GPS approach with vertical guidance (LPV, LNAV/VNAV, LNAV +V) is loaded into the active flight plan. The active waypoint must be part of the flight plan (cannot be a direct-to a waypoint not in the flight plan).
- 2) Ensure that GPS is the selected navigation source.
- 3) Press the **APR** Key.



**NOTE:** Some RNAV (GPS) approaches provide a vertical descent angle as an aid in flying a stabilized approach. These approaches are NOT considered Approaches with Vertical Guidance (APV). Approaches that are annunciated on the HSI as LNAV or LNAV+V are considered Non-precision Approaches (NPA) and are flown to an MDA even though vertical glidepath (GP) information may be provided.



**WARNING:** When flying an LNAV approach (with vertical descent angle) with the autopilot coupled, the aircraft will not level off at the MDA even if the MDA is set in the altitude preselect.

Upon reaching the glidepath, the flight director transitions to Glidepath Mode and begins to capture and track the glidepath.

Once the following conditions have been met, the glidepath can be captured:

- The active waypoint is at or after the final approach fix (FAF).
- Vertical deviation is valid.
- The CDI is at less than full-scale deviation.
- Automatic sequencing of waypoints has not been suspended.



Figure 3-13 Glidepath Mode

### 3.1.13.8 GO AROUND (GA) AND TAKEOFF (TO) MODES



**NOTE:** *TO and GA modes are only available when the G5 is configured as a backup unit in a G3X/G3X Touch system.*

Go Around and Takeoff modes are coupled pitch and roll modes and are annunciated as both the vertical and lateral modes when active. In these modes, the flight director commands a constant set pitch attitude and keeps the wings level. The GA Switch is used to activate both modes. The mode entered by the flight director depends on whether the aircraft is on the ground or in the air.

Takeoff Mode provides an attitude reference during rotation and takeoff. This mode can be selected only while on the ground by pushing the **TO/GA** Button. The flight director Command Bars assume a wings-level, pitch-up attitude.

Pressing the **TO/GA** Button while in the air activates the flight director in a wings-level, pitch-up attitude, allowing the execution of a missed approach or a go around. Go Around Mode arms Selected Altitude Capture Mode automatically, and attempts to modify the aircraft attitude (i.e., with the **NOSE UP/DN** Wheel) will result in reversion to Pitch and Roll Hold modes.

### 3.1.14 LATERAL MODES

The following table lists the lateral modes and respective control(s) and annunciation. Refer to the vertical modes section for information regarding Takeoff and Go Around Modes.

**Table 3-6 Flight Director Lateral Modes**

Lateral Mode	Description	Control	Annunciation
Roll Hold	Holds the current aircraft roll attitude or rolls the wings level, depending on the commanded bank angle	(default)	ROL
Heading (Installations with a magnetometer)	Captures and tracks the Selected Heading	<b>HDG</b> Key	HDG
Track (Installations without a magnetometer)	Captures and tracks the Selected Ground Track	<b>HDG</b> Key	TRK
Navigation, GPS	Captures and tracks the selected navigation source (GPS)	<b>NAV</b> Key	GPS
Approach, GPS	Captures and tracks the selected navigation source (GPS)	<b>APR</b> Key	GPS
Takeoff	Commands a constant pitch angle and wings level on-ground in preparation for takeoff	<b>TO/GA</b> Button	TO*
Go Around	Commands a constant pitch angle and wings level in the air		GA*

\* TO, and GA modes are only available when the G5 is configured as a backup unit in a G3X/G3X Touch system.

The CWS Button (if equipped) does not change lateral references for HDG or NAV modes. The autopilot guides the aircraft back to the Selected Heading/Course upon release of the CWS Button.

### 3.1.14.1 ROLL HOLD MODE (ROL)



**NOTE:** If Roll Hold Mode is activated as a result of a mode reversion, the flight director rolls the wings level.

When the flight director is activated or switched, Roll Hold Mode is selected by default. This mode is annunciated as 'ROL' in the Autopilot Status Box. The current aircraft bank angle is held, subject to the bank angle condition.



Figure 3-14 Roll Hold Mode Annunciation

Table 3-7 Roll Hold Mode Responses

Bank Angle	Flight Director Response
< 6°	Rolls wings level
6 to 20°	Maintains current aircraft roll attitude
> 20°	Limits bank to 20°

#### 3.1.14.1.1 CHANGING THE ROLL REFERENCE

When operating in Roll Hold Mode, the roll reference can be adjusted in the following ways:

- Hold the CWS Button (if equipped), establish the desired bank angle, then release the CWS Button.

### 3.1.14.2 HEADING SELECT MODE (HDG)



**NOTE:** HDG mode is available in a standalone installation with a magnetometer and when the G5 is configured as a backup in a G3X/G3X Touch system and the G5 is receiving magnetic heading data from an ADAHRS unit.

Heading Select Mode is activated by pressing the **HDG** Key. Heading Select Mode acquires and maintains the Selected Heading. The Selected Heading is shown by a light blue bug on the HSI and in the box on the bottom right of the HSI.

#### Changing the selected heading:

- 1) Press the Knob to display the Menu.
- 2) Select **Heading** and use the Knob to change the Selected Heading.

Or

Rotate the **HDG Knob** (GMC 307 only).

#### Activating heading mode:

Press the **HDG** Key on the GMC.

Holding the CWS Button (if equipped) and hand-flying the aircraft does not change the Selected Heading. The autopilot guides the aircraft back to the Selected Heading upon release of the CWS Button.

Turns are commanded in the same direction as Selected Heading Bug movement, even if the bug is turned more than 180° from the present heading (e.g., a 270° turn to the right). However, Selected Heading changes of more than 330° at a time result in turn reversals.



**Figure 3-15** Heading Mode Annunciation

### 3.1.14.3 TRACK MODE (TRK)



**NOTE:** *TRK Mode is only available if a magnetometer is not configured.*

Track Mode is activated by pressing the **HDG** Key. Track Mode acquires and maintains the Selected Ground Track. The Selected Ground Track is displayed as a magenta bug on the HSI and in the box on the bottom right of the HSI.

#### Changing the selected ground track:

- 1) Press the Knob to display the Menu.
- 2) Select **Track** and use the Knob to change the Selected Ground Track.

**Or**

Rotate the **HDG Knob** on the GMC.

#### Activating track mode:

Press the **HDG** Key on the GMC.

Holding the CWS Button (if equipped) and hand-flying the aircraft does not change the Selected Ground Track. The autopilot guides the aircraft back to the Selected Ground Track upon release of the CWS Button.

Turns are commanded in the same direction as Selected Ground Track Bug movement, even if the bug is turned more than 180° from the present heading (e.g., a 270° turn to the right). However, Selected Ground Track changes of more than 330° at a time result in turn reversals.



Figure 3-16 Track Mode Annunciation

### 3.1.14.4 NAVIGATION MODE (GPS)



**NOTE:** The navigation receiver must have an active GPS course for the flight director to enter Navigation Mode.



**NOTE:** When intercepting a flight plan leg, the flight director gives commands to capture the active leg at approximately a 45° angle to the track between the waypoints defining the active leg. The flight director does not give commands fly to the starting waypoint of the active leg.

Pressing the **NAV** Key selects Navigation Mode. Navigation Mode acquires and tracks the navigation source. The flight director follows GPS roll steering commands when GPS is the navigation source. Navigation Mode can also be used to fly non-precision GPS approaches where vertical guidance is not required.

If the Course Deviation Indicator (CDI) shows greater than one dot when the **NAV** Key is pressed, the selected mode is armed. If the CDI is less than one dot, Navigation Mode is automatically captured when the **NAV** Key is pressed. The armed annunciation appears in white to the left of the active roll mode.



Figure 3-17 Navigation Mode Annunciation

If Navigation Mode is active and either of the following occur, the AFCS reverts to Roll Hold Mode (wings rolled level):

- Active navigation source manually switched
- Active flight plan is deleted
- GPS reception is lost

### 3.1.14.5 GPS APPROACHES WITHOUT VERTICAL GUIDANCE



**NOTE:** The selected navigation receiver must have an active GPS course for the flight director to enter Approach Mode.

Press the **NAV** Key to arm/activate GPS (LNAV only) lateral mode. The lateral mode acquires and tracks the selected navigation source, depending on the loaded approach. Press **NAV** when the CDI is greater than one dot to arm the selected mode (annunciated in white). Press **NAV** when the CDI deviation is less than one dot to activate, capture and track the selected navigation source.

Table 3-8 Approach without Vertical Guidance

Example	Control	Lateral Mode	Annunciation	Description
LNAV	<b>NAV</b> Key	Approach, GPS	GPS	Captures and tracks the selected navigation source (GPS)

### 3.1.14.6 GPS APPROACH WITHOUT VERTICAL GUIDANCE

A GPS approach without vertical guidance (LNAV) is flown using GPS NAV Mode.

#### Selecting a GPS Approach without vertical guidance:

- 1) EXTERNAL NAVIGATOR: Ensure a GPS approach without vertical guidance (LNAV) is loaded into the active flight plan.
- 2) EXTERNAL NAVIGATOR: Ensure the 'GPS' indication is showing in the lower-left corner. If not, press the CDI Key.
- 3) EXTERNAL NAVIGATOR: Select and activate the GPS approach using the PROC Key.
- 4) Press the **NAV** Key.
- 5) Adjust the aircraft's pitch axis as required.



### 3.1.14.7 GPS APPROACHES WITH LATERAL + VERTICAL GUIDANCE

Press the **APR** Key to arm/activate both lateral and vertical modes for approach. When Glidepath (GP) Mode is armed for a GPS approach with vertical guidance, GPS Mode is automatically armed. Press the **APR** Key when the CDI is greater than one dot to arm the selected modes (annunciated in white). Press the **APR** Key when the CDI deviation is less than one dot to activate, capture and track the selected navigation source.

**Table 3-9 Lateral + Vertical Approaches**

Example	Control	Modes	Annunciation	Description
LPV, LNAV/ VNAV, LNAV+V	<b>APR</b> Key	Lateral: GPS	GPS	Captures and tracks the lateral portion of a GPS approach
		Vertical: Glidepath	GP	Captures and tracks a WAAS approach glidepath



**NOTE:** To cancel Glidepath (GP) Mode without cancelling GPS Mode, **NAV** once. Pressing it a second time cancels GPS Mode.

When Glidepath (GP) Mode is armed for a GPS approach with vertical guidance, GPS Mode is automatically armed.

#### Selecting a GPS approach with vertical guidance:

- 1) EXTERNAL NAVIGATOR: Ensure a GPS approach with vertical guidance (LPV, LNAV/VNAV, LNAV+V) is loaded into the active flight plan.
- 2) EXTERNAL NAVIGATOR: Ensure the 'GPS' indication is showing in the lower-left corner. If not, press the CDI Key.
- 3) EXTERNAL NAVIGATOR: Select and activate the GPS approach using the PROC Key.
- 4) Press the **APR** Key.

### 3.1.14.8 LEVEL MODE

Level Mode is coupled in pitch and roll modes and is annunciated as both the vertical and lateral modes when active. Pressing the **LVL** Key engages the autopilot in Level vertical and lateral modes. Level Mode does not track altitude or heading. When the **LVL** Key is pressed all armed and active modes are cancelled and the autopilot and flight director revert to LVL mode for pitch and roll. While in level mode, all other modes are available by pressing the corresponding button.

## 3.2 SYSTEM MESSAGES

**Table 3-10 System Messages**

Message	Comments
<b>Critical battery fault! Powering off...</b>	Battery has a critical fault condition and the unit is about to power off to avoid damage to the battery.
<b>Battery fault</b>	Battery has a fault condition - examine fault display in configuration mode and contact Garmin if it persists.
<b>Battery charger fault</b>	Battery charger has a fault condition - examine fault display in configuration mode and contact Garmin if it persists.
<b>Low battery</b>	Battery charge level is low
<b>Unable to</b>	
<b>Hardware fault</b>	Unit has a hardware fault - contact Garmin for service
<b>Power supply fault</b>	Unit power supply fault detected - contact Garmin for service if it persists
<b>Unit temperature limit exceeded</b>	Unit is too hot or too cold
<b>Network address conflict</b>	Another G5 with the same address is detected on the network (most commonly a wiring error on one of the units)
<b>Communication error</b>	General communication error (most commonly appears in conjunction with Network Address Conflict message)
<b>Factory calibration data invalid</b>	Unit calibration data not valid - return to Garmin
<b>Magnetic field model database out of date</b>	Internal magnetic field database is out of date - software update required
<b>Using external GPS data</b>	GPS data from another network LRU is being used. The unit's internal GPS receiver is enabled, but unable to establish a GPS fix
<b>Servo clutch fault</b>	An autopilot servo is reporting a clutch monitor fault

## 3.3 AFCS ALERTS (OPTIONAL)



Figure 3-18 AFCS Alerts

### 3.3.1 STATUS ALERTS

If the commanded operation cannot be achieved due to the limitations configured, the following messages can be displayed over the pitch ladder. The annunciation is removed once the condition is resolved.

Alert Condition	Annunciation	Description
Up-elevator Trim Required	<b>TRIM UP</b>	The autopilot does not have the required elevator authority to reach the desired flight condition.
Down-elevator Trim Required	<b>TRIM DOWN</b>	

Table 3-11 Status Alerts

### 3.3.2 SPEED ALERTS

If the remote autopilot unit supports speed alerts and the airspeed limitations configured have been reached, the following messages can be displayed over the pitch ladder. The annunciation is removed once the condition is resolved.

Alert Condition	Annunciation	Description
High speed Protection	<b>MAX SPEED</b>	Autopilot unit will raise the nose to limit the aircraft's speed.
Low speed Protection	<b>MIN SPEED</b>	Autopilot unit will lower the nose to prevent the aircraft's speed from decreasing.

Table 3-12 Speed Alerts

## SECTION 4 ADDITIONAL FEATURES

### 4.1 ELECTRONIC STABILITY & PROTECTION (ESP)



**WARNING:** Do not assume ESP will provide stability protection in all circumstances. There are in-flight situations that can exceed the capabilities of ESP technology.

Electronic Stability and Protection (ESP) is a feature that is intended to monitor the aircraft and provide control input feedback when necessary to discourage operating the aircraft at potentially unsafe attitudes and/or airspeeds. If enabled, this feature will automatically arm when the aircraft is above 500 feet AGL and the autopilot is not engaged, and disarm when below 200 feet AGL.

When selected, ESP engages automatically when the aircraft approaches or exceeds one or more predetermined airspeed or attitude limitations. Stability protection for each flight axis is provided by the autopilot servos, which apply force to the appropriate control surface(s) to discourage pilot control inputs that would cause the aircraft to exceed the normal or "protected" flight envelope. This is perceived by the pilot as resistance to control movement in the undesired direction when the aircraft approaches a steep attitude, and/or the airspeed is below the minimum or above the maximum configured airspeed.

As the aircraft deviates further from the normal attitude and/or airspeed, the force increases proportionally (up to an established maximum) to encourage control movement in the direction necessary to return to the normal attitude and/or airspeed range.

When ESP has been engaged for more than fifteen seconds (cumulative; not necessarily consecutive seconds) of a 30-second interval, the autopilot can be configured to engage with the flight director in Level Mode, bringing the aircraft into level flight. An aural "Autopilot" alert is played and the flight director mode annunciation will indicate 'LVL' for vertical and lateral modes.

Level mode as activated by ESP is limited by altitude. ESP will not be able to activate Level mode until the aircraft climbs above 2000 feet AGL. ESP will be locked out of automatically activating Level mode after the aircraft descends below 1500 feet AGL as well. Also note that Level mode as activated by ESP is different than manually selected Level mode. Manually selected Level mode is not limited by altitude at all.



**NOTE:** If AGL height data is unavailable (i.e., GPS altitude or terrain data is unavailable), automatic engagement of Level mode is not supported.

ESP is enabled or disabled from the PFD Page Menu.

**Enabling/Disabling ESP using the G3X Touch Autopilot Interface:**

- 1) From the PFD Page, press the **Knob** to display the Menu.
- 2) Turn the **Knob** to highlight **ESP**.
- 3) Press the **Knob** to enable or disable ESP.



Figure 4-1 AFCS (ESP Enabled)

### 4.1.1 ROLL ENGAGEMENT

Roll Limit Indicators displayed on the roll scale are configurable between 45° and 60° right and left, indicating where ESP will engage. As roll attitude exceeds the configured limit, ESP will engage and the Roll Limit Indicators will move to 15° less than the configured ESP bank limit. The Roll Limit Indicator now indicates where ESP will disengage as roll attitude decreases.

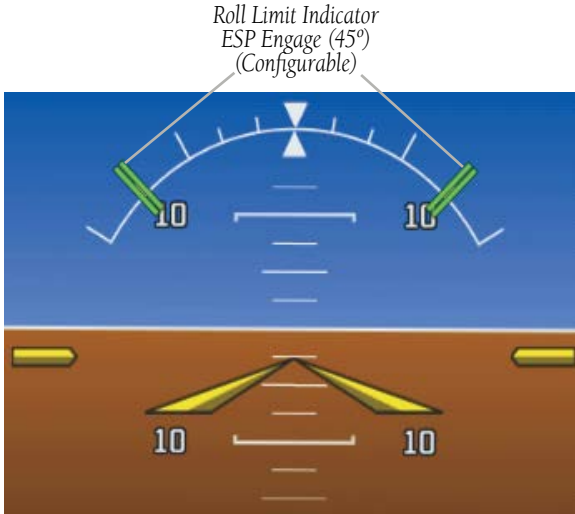


Figure 4-2 ESP Roll Engagement Indication (ESP Enabled but NOT Engaged)


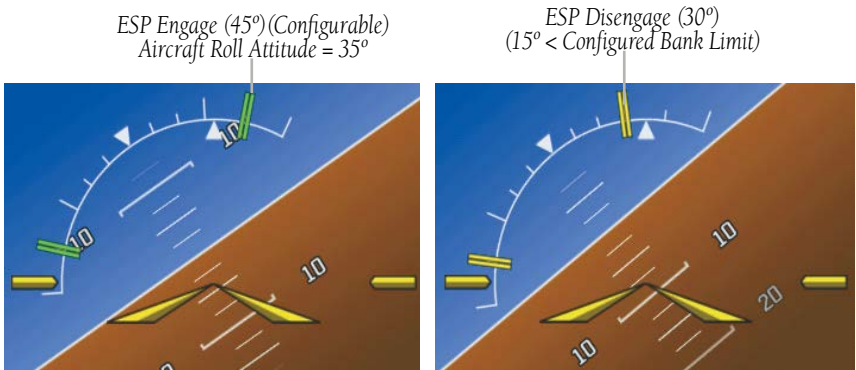


Figure 4-3 Roll Increasing to ESP Engagement

Once engaged, the torque applied by ESP is at its maximum when bank angle is 15° more than the configured bank limit, and tapers to the minimum applied torque when the bank angle is 15° less than the configured bank limit. The force increases as roll attitude increases and decreases as roll attitude decreases. The applied force is intended to encourage pilot input to return the airplane to a more normal roll attitude. When beyond 15° of the configured bank limit, the maximum torque is held until the aircraft returns inside the protected envelope.

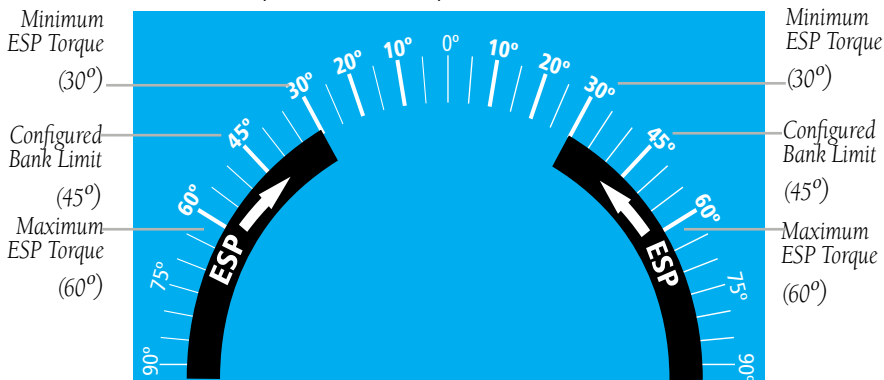

**Figure 4-4 ESP Roll Operating Range When Engaged**  
 (Force Increases as Roll Increases & Decreases as Roll Decreases)


### 4.1.2 PITCH ENGAGEMENT

ESP pitch engagement is configurable between 10° and 25° nose-up and between 5° and 25° nose-down. Once engaged, the torque applied by ESP is at its maximum when pitch is 5° more than the configured nose-up and nose-down pitch limits, and tapers to the minimum applied torque when pitch is 5° less than the configured nose-up and nose-down pitch limits. When beyond 5° of the configured pitch limit, the maximum torque is held until the aircraft returns inside the protected envelope.

The opposing force increases or decreases depending on the pitch angle and the direction of pitch travel. This force is intended to encourage movement in the pitch axis in the direction of the normal pitch attitude range for the aircraft.




The presence of yellow chevrons indicate that ESP is engaged in these nose-up/nose-down conditions.

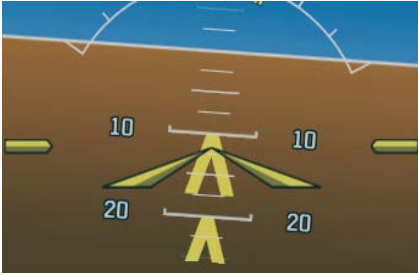

**Figure 4-5 ESP Engaged (Nose-Low)**



**Figure 4-6 ESP Engaged (Nose-High)**

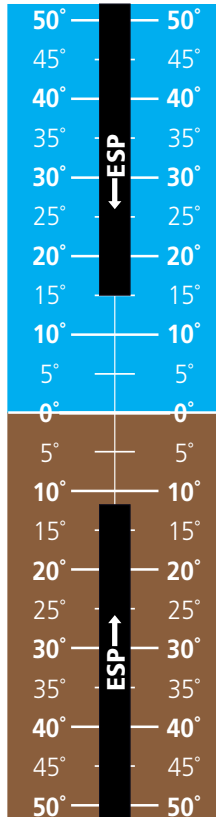

**Figure 4-7 ESP Pitch Operating Range When Engaged (Force Increases as Pitch Increases & Decreases as Pitch Decreases)**

### 4.1.3 AIRSPEED PROTECTION



**NOTE:** If AGL height data is unavailable (i.e., GPS altitude or terrain data is unavailable), low-airspeed protection is not supported.

An airspeed below the minimum configured airspeed or above maximum configured airspeed will result in ESP applying force to raise or lower the nose of the aircraft. When the high or low airspeed condition is remedied, ESP force is no longer applied.

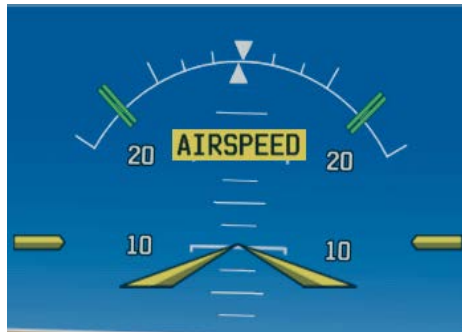


Figure 4-8 ESP Engaged  
(Low Airspeed)

**A**

- Airspeed Indicator 12
- Altimeter 17–18
- Altitude Alerting 18
- Altitude Hold Mode (ALT) 56
- Approach Mode 68
- Attitude and Heading Reference System (AHRS) 7, 8
- Attitude Indicator 15
- Automatic Reversion 60
- Autopilot Disconnect 44

**B**

- Barometric setting, Altimeter 12, 16–17, 18–19
- Bearing Pointers 26

**C**

- Command Bars 50
- Control Wheel Steering (CWS) 39

**D**

- Display
  - Overview 5

**F**

- Flight director (FD) 40
  - Modes, vertical 52–66
- Flight Level Change Mode 58

**G**

- Glidepath Mode (GP) 61

**H**

- Heading 12
- Heading Select Mode 65, 66

- Heading Strip 19
- Horizontal Situation Indicator (HSI) 28

**I**

- Integrated Autopilot
  - Disengaging 46
  - Engaging 45

**M**

- MENU Key 6
- Menus 9, 10
- Messages
  - Miscellaneous 71, 72

**N**

- Navigation Mode 67–68
- NRST Key 6

**P**

- Pitch Hold Mode 54
- Power-up 6

**R**

- Roll Hold Mode 64

**S**

- Secure Digital (SD) Cards 6
  - Installing 6
- Selected Altitude 54, 55, 57
- Selected Altitude Capture Mode 54, 55, 57, 62
- Selected Heading 28, 65, 66
- System
  - Annunciations 7
  - Functionality 9
  - Initialization 6
  - Power-up 6

**T**

- Takeoff Mode 62
- Transponder
  - Status Box 12
- True Airspeed (TAS) 12

**V**

- Vertical Deviation Indicator (VDI) 32
- Vertical Speed Indicator (VSI) 21, 30
- Vertical Speed Mode 57

Blank Page



Garmin International, Inc.  
1200 East 151st Street  
Olathe, Kansas 66062, U.S.A.

Garmin AT, Inc.  
2345 Turner Road SE  
Salem, OR 97302, U.S.A.

Garmin (Europe) Ltd.  
Liberty House, Hounsdown Business Park  
Southampton, Hampshire SO40 9LR U.K.

Garmin Corporation  
No. 68, Zhangshu 2nd Road  
Xizhi District, New Taipei City, Taiwan

**Contact Garmin Product Support at**  
**[www.flygarmin.com](http://www.flygarmin.com)**